


# Camera & Optics for Image Formation

**Jianping Fan**  
**Dept of Computer Science**  
**UNC-Charlotte**

**Course Website:**

**<http://webpages.uncc.edu/jfan/itcs5152.html>**

# ISP Pipeline for Image Formation

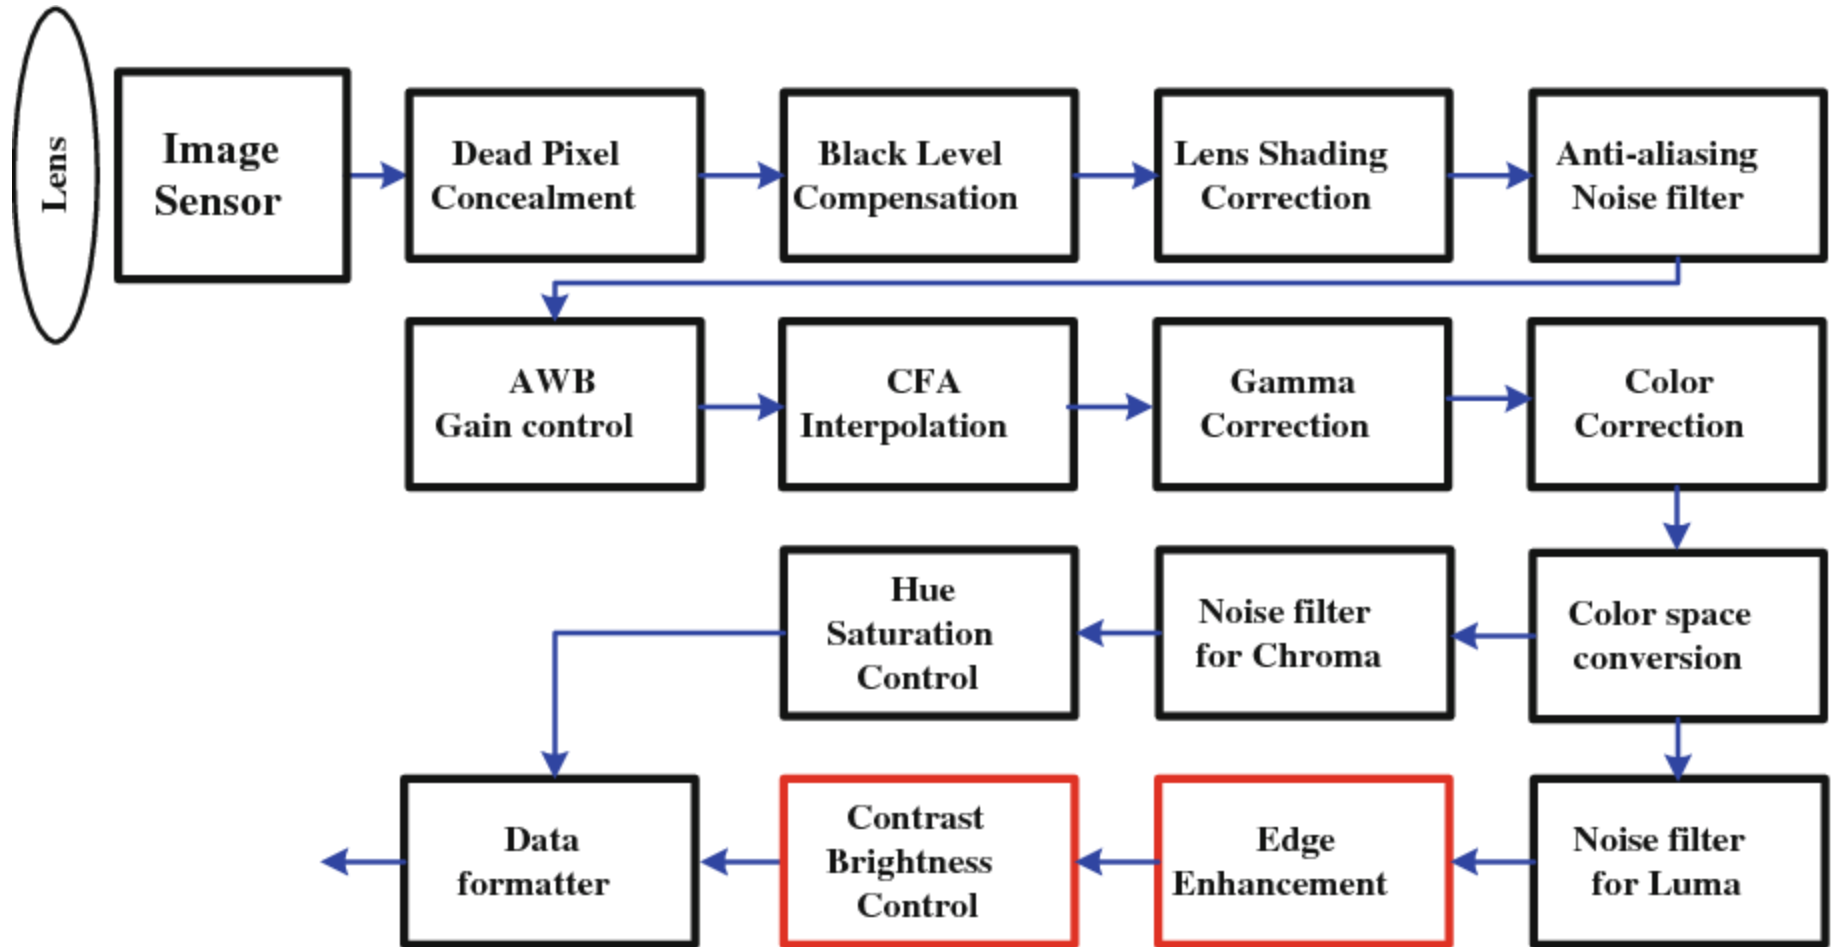


# The Geometry of Image Formation

Mapping between image and world coordinates

- Pinhole camera model
- Projective geometry
  - Vanishing points and lines
- Projection matrix


# Image formation

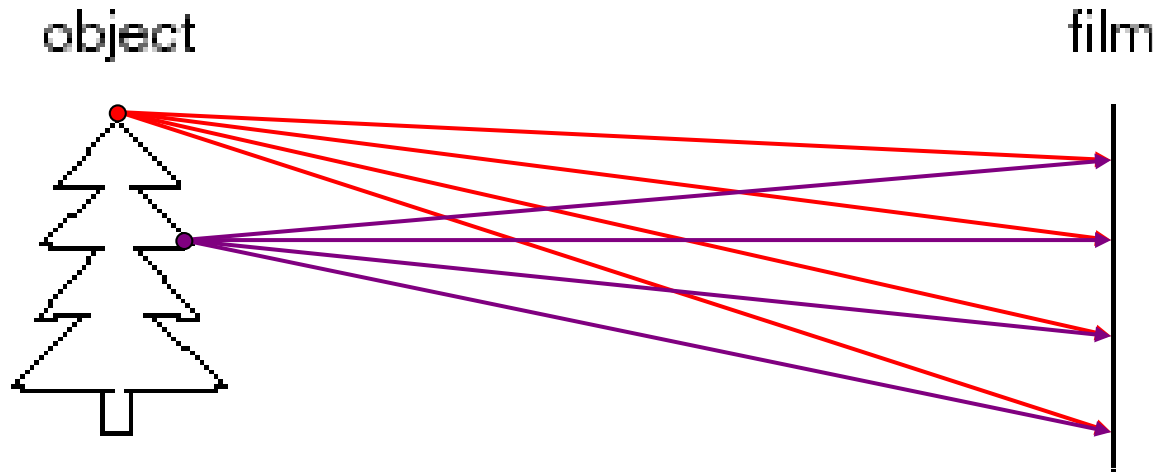

Let's design a camera

- Idea 1: put a piece of film in front of an object
- Do we get a reasonable image?


# Pinhole camera

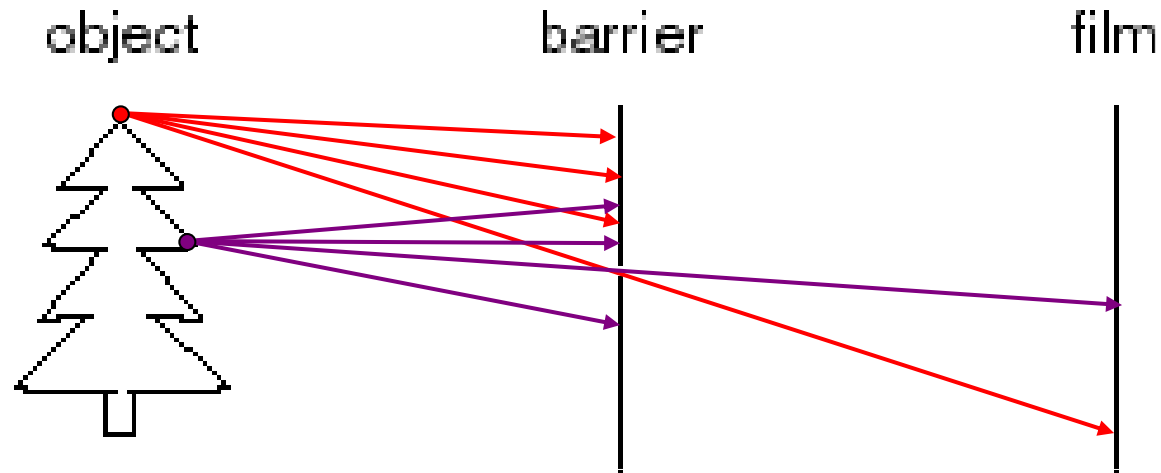

Idea 2: add a barrier to block off most of the rays

- This reduces blurring
- The opening known as the **aperture**

# Pinhole camera

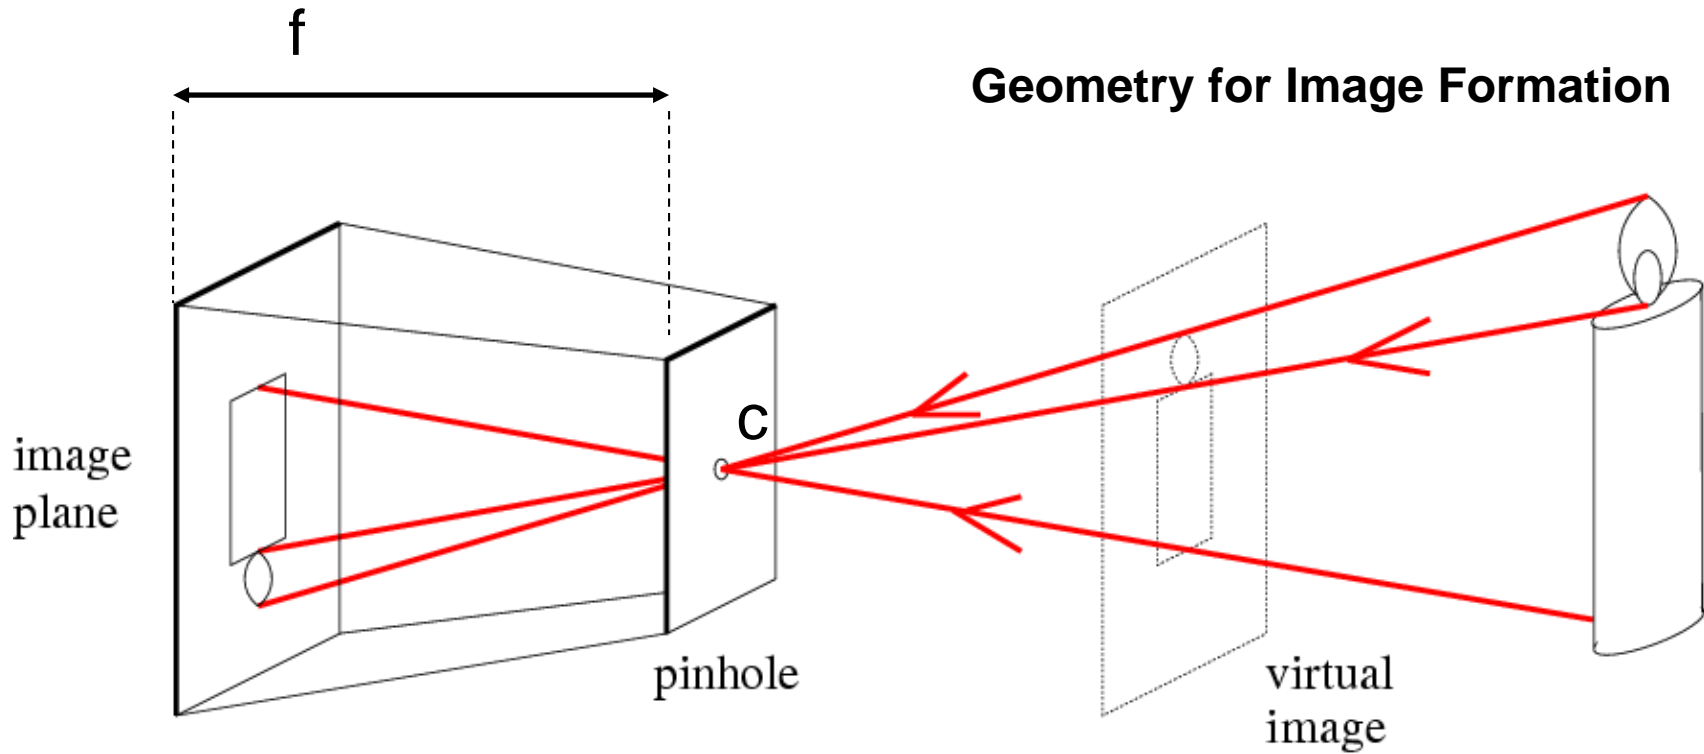


$f$  = focal length

$c$  = center of the camera

# Dimensionality Reduction Machine (3D to 2D)


*3D world*

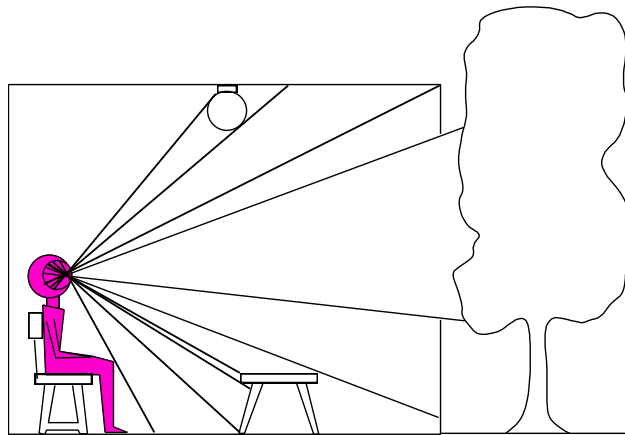


Point of observation



*2D image*

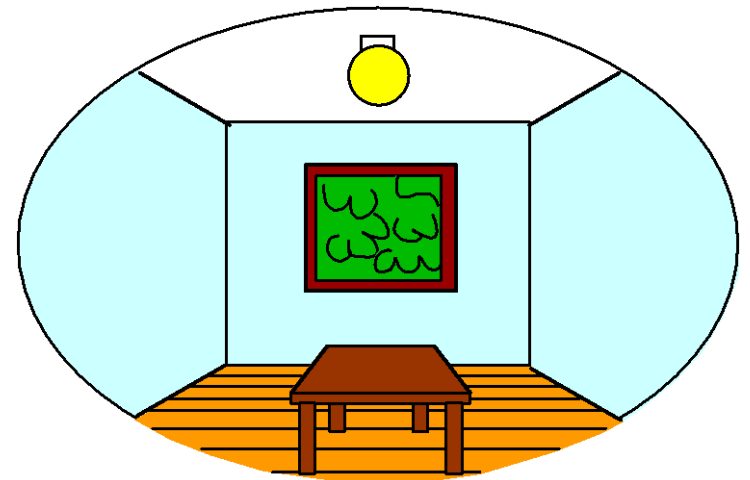

# Camera and World Geometry

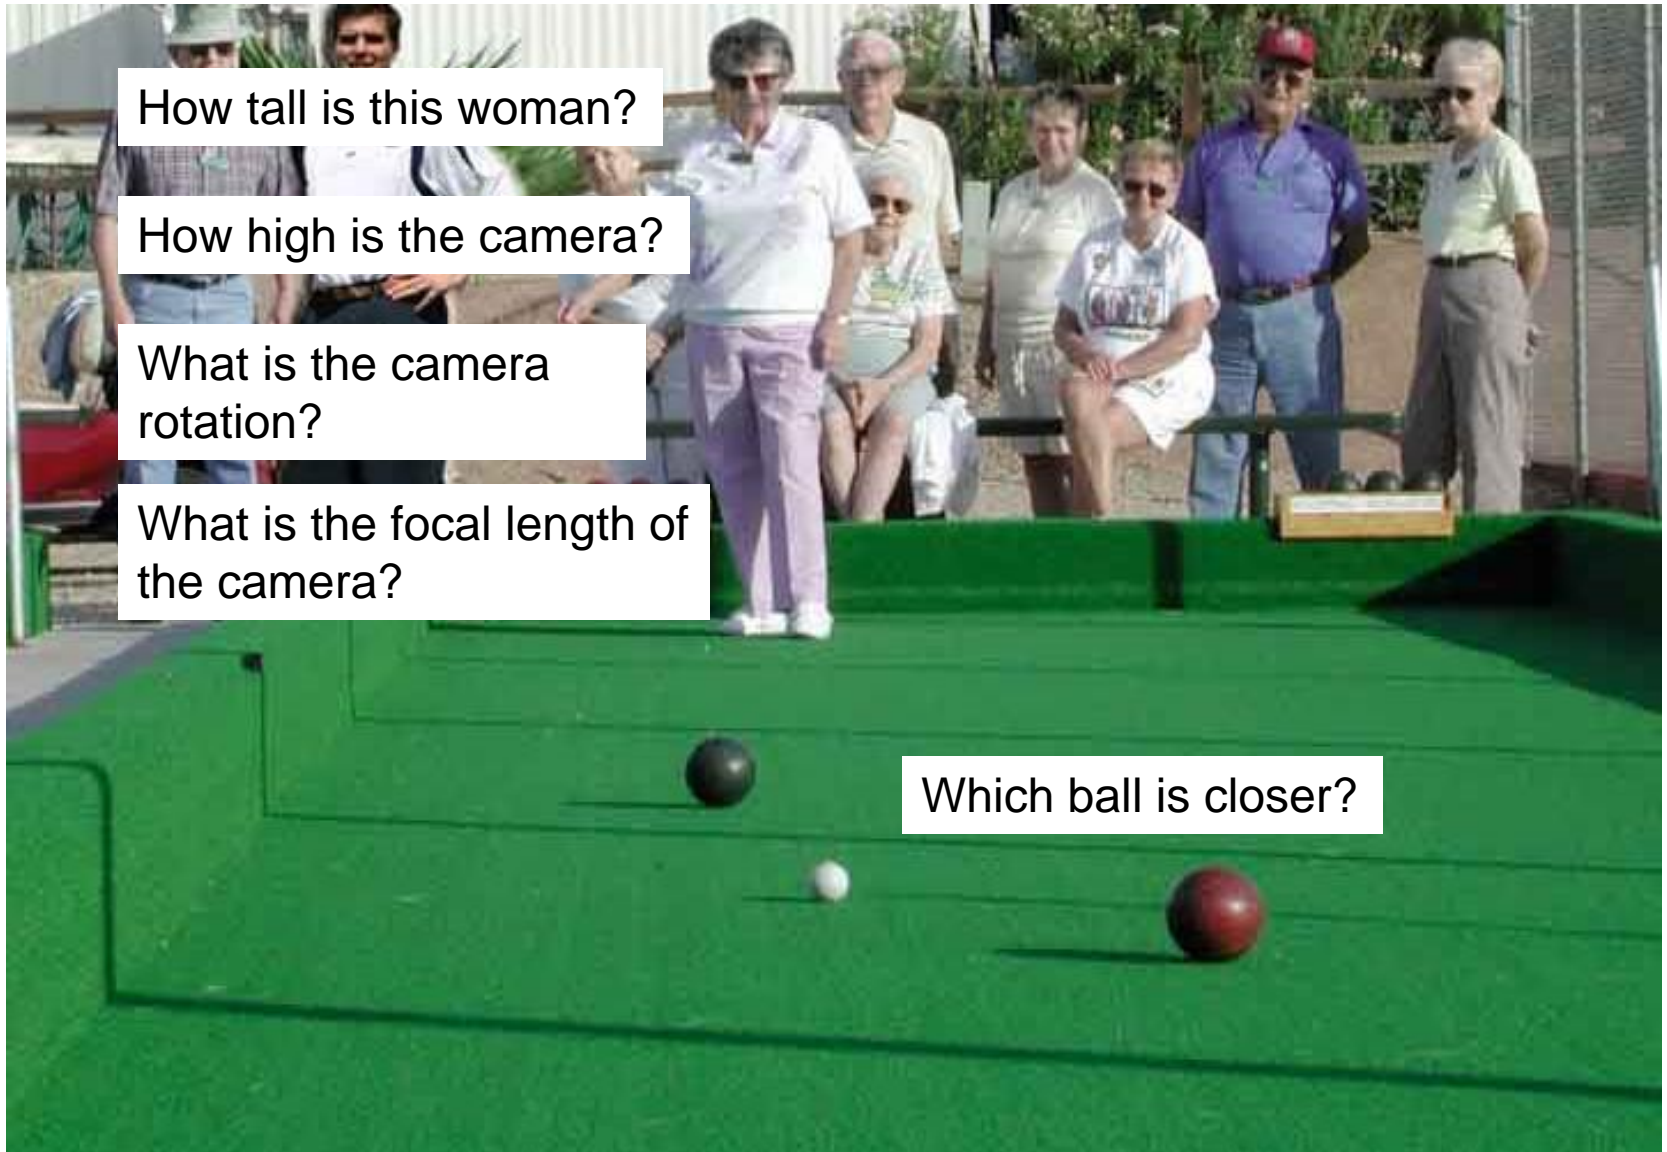




# Projection can be tricky...




# Projective Geometry

What is lost?

- Length

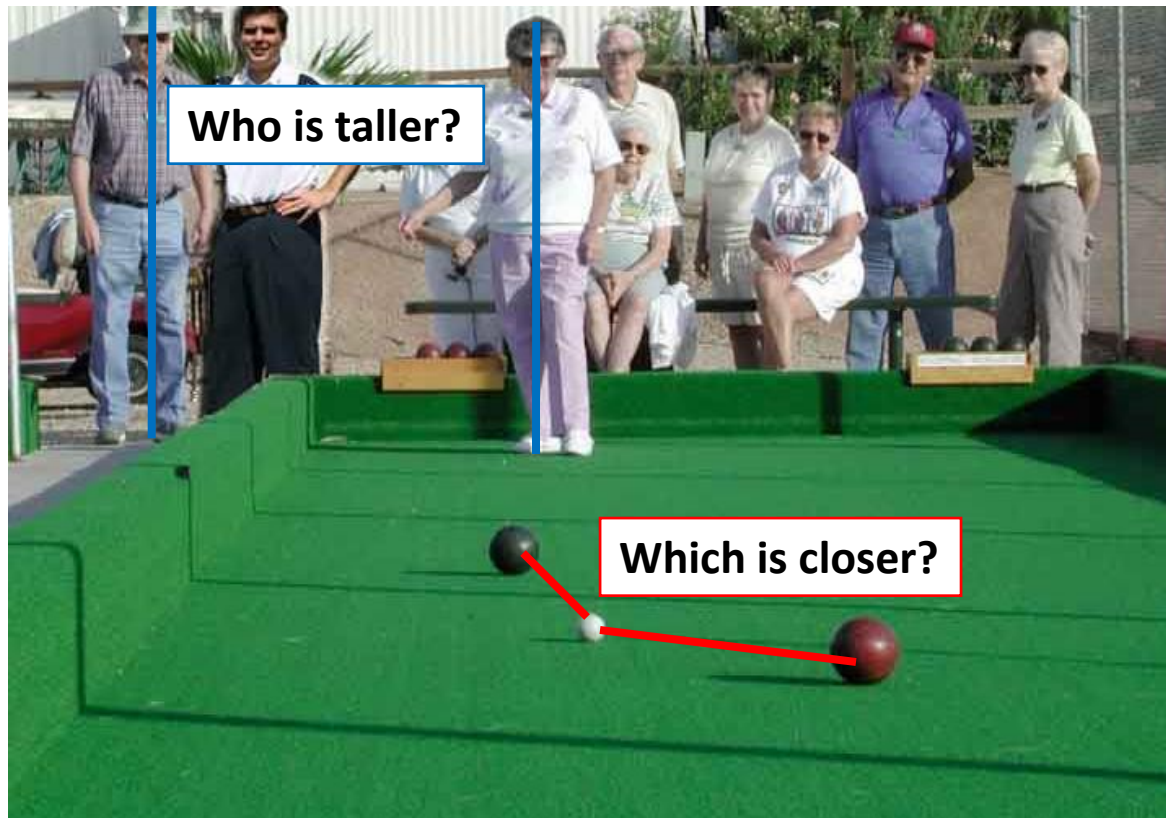


# Length and area are not preserved

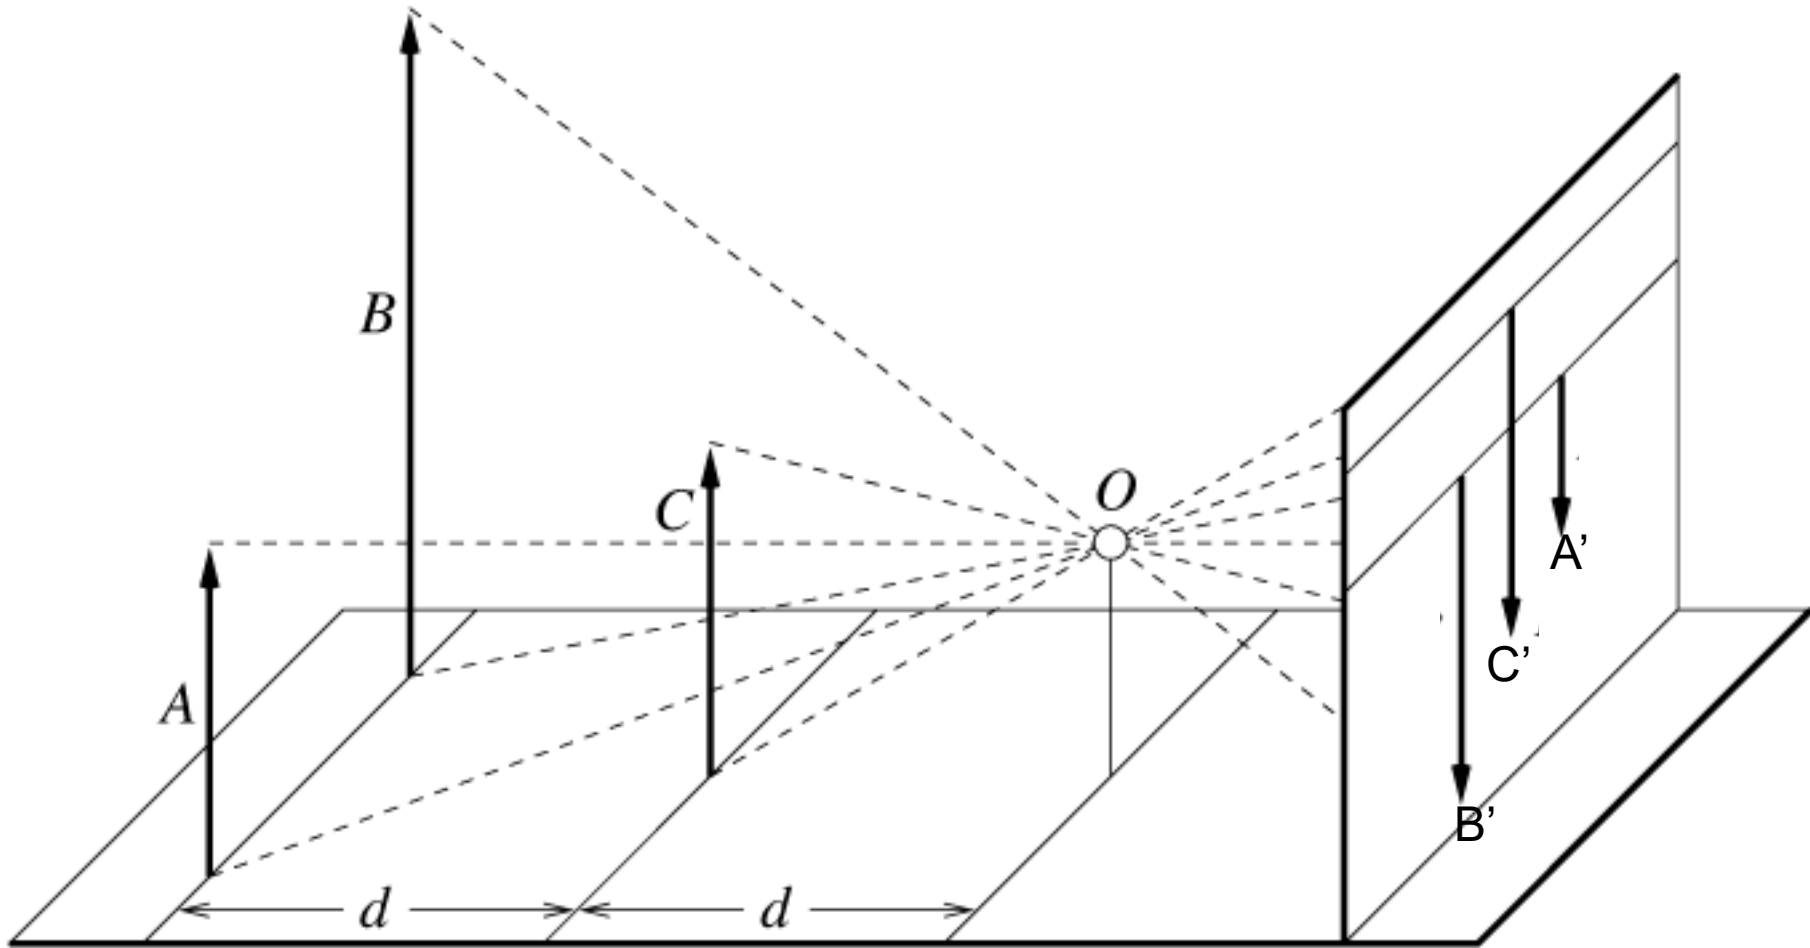

# Projective Geometry

What is lost?


- Length
- Angles

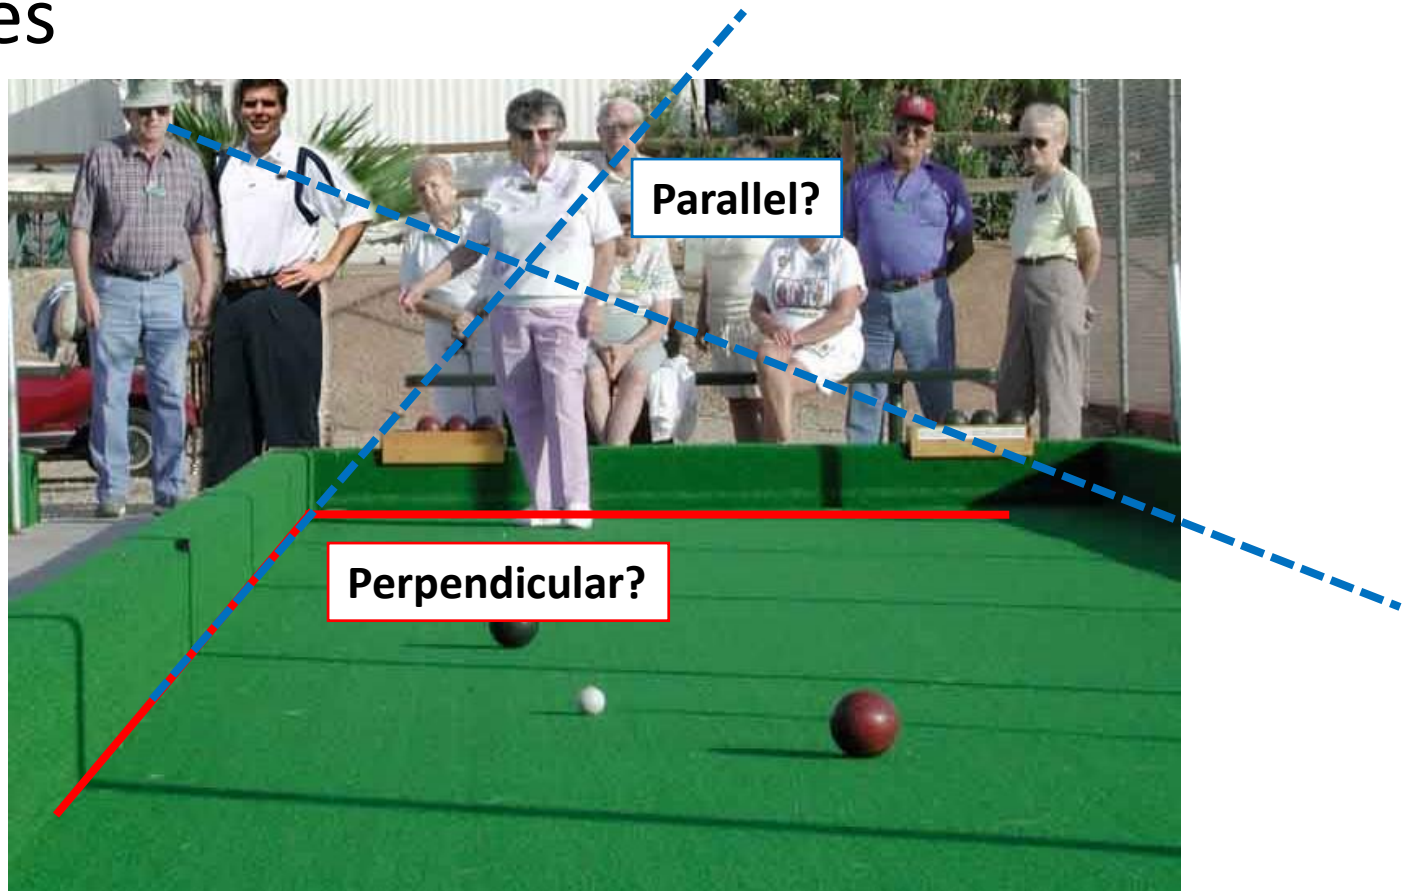

# Projective Geometry

What is preserved?


- Straight lines are still straight

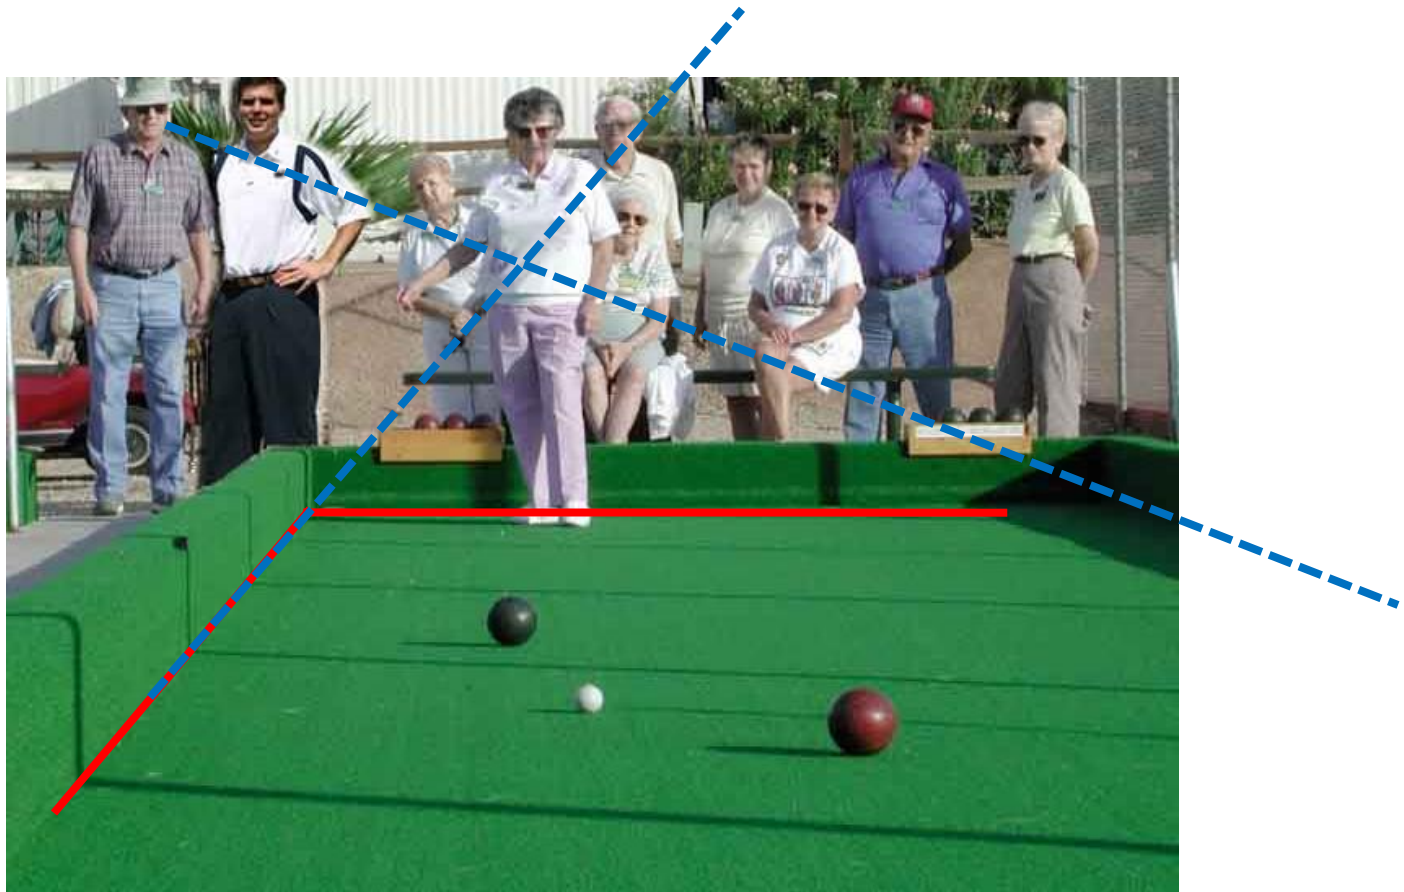




# Vanishing points and lines


Parallel lines in the world intersect in the image at a “vanishing point”

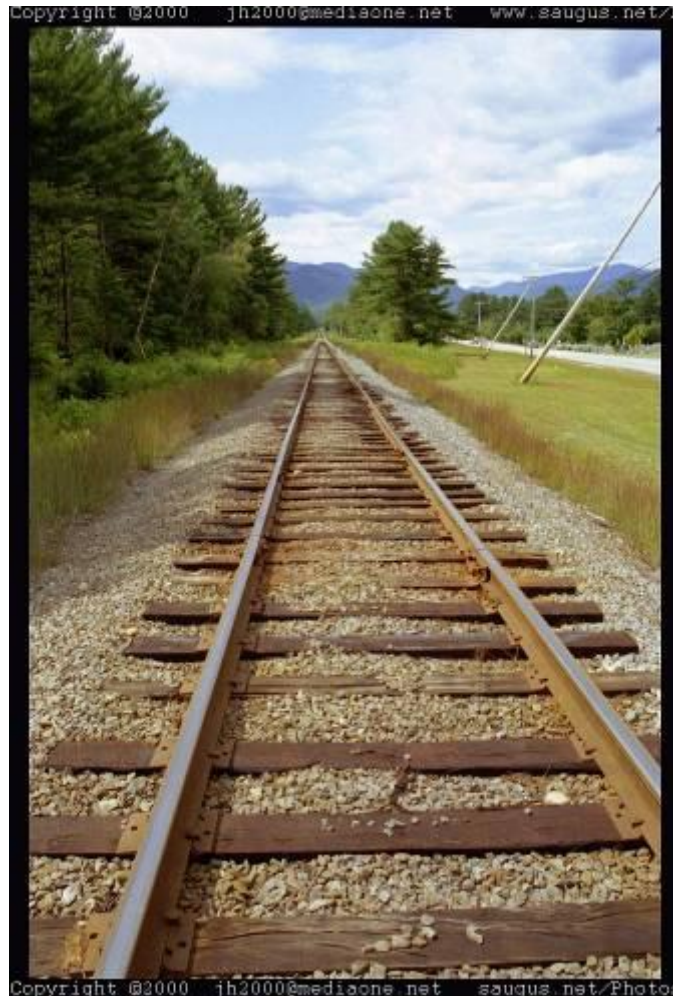

# Vanishing points and lines

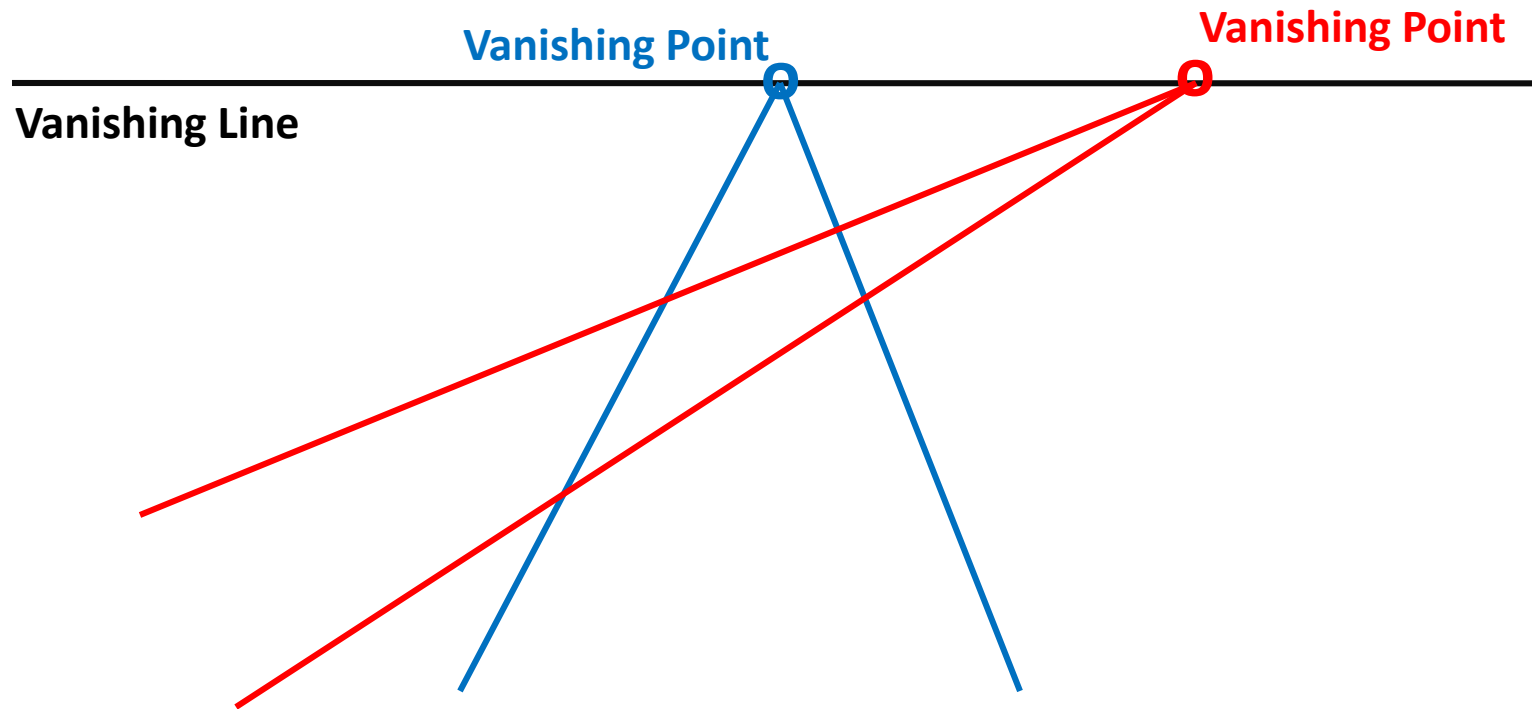


# Vanishing points and lines

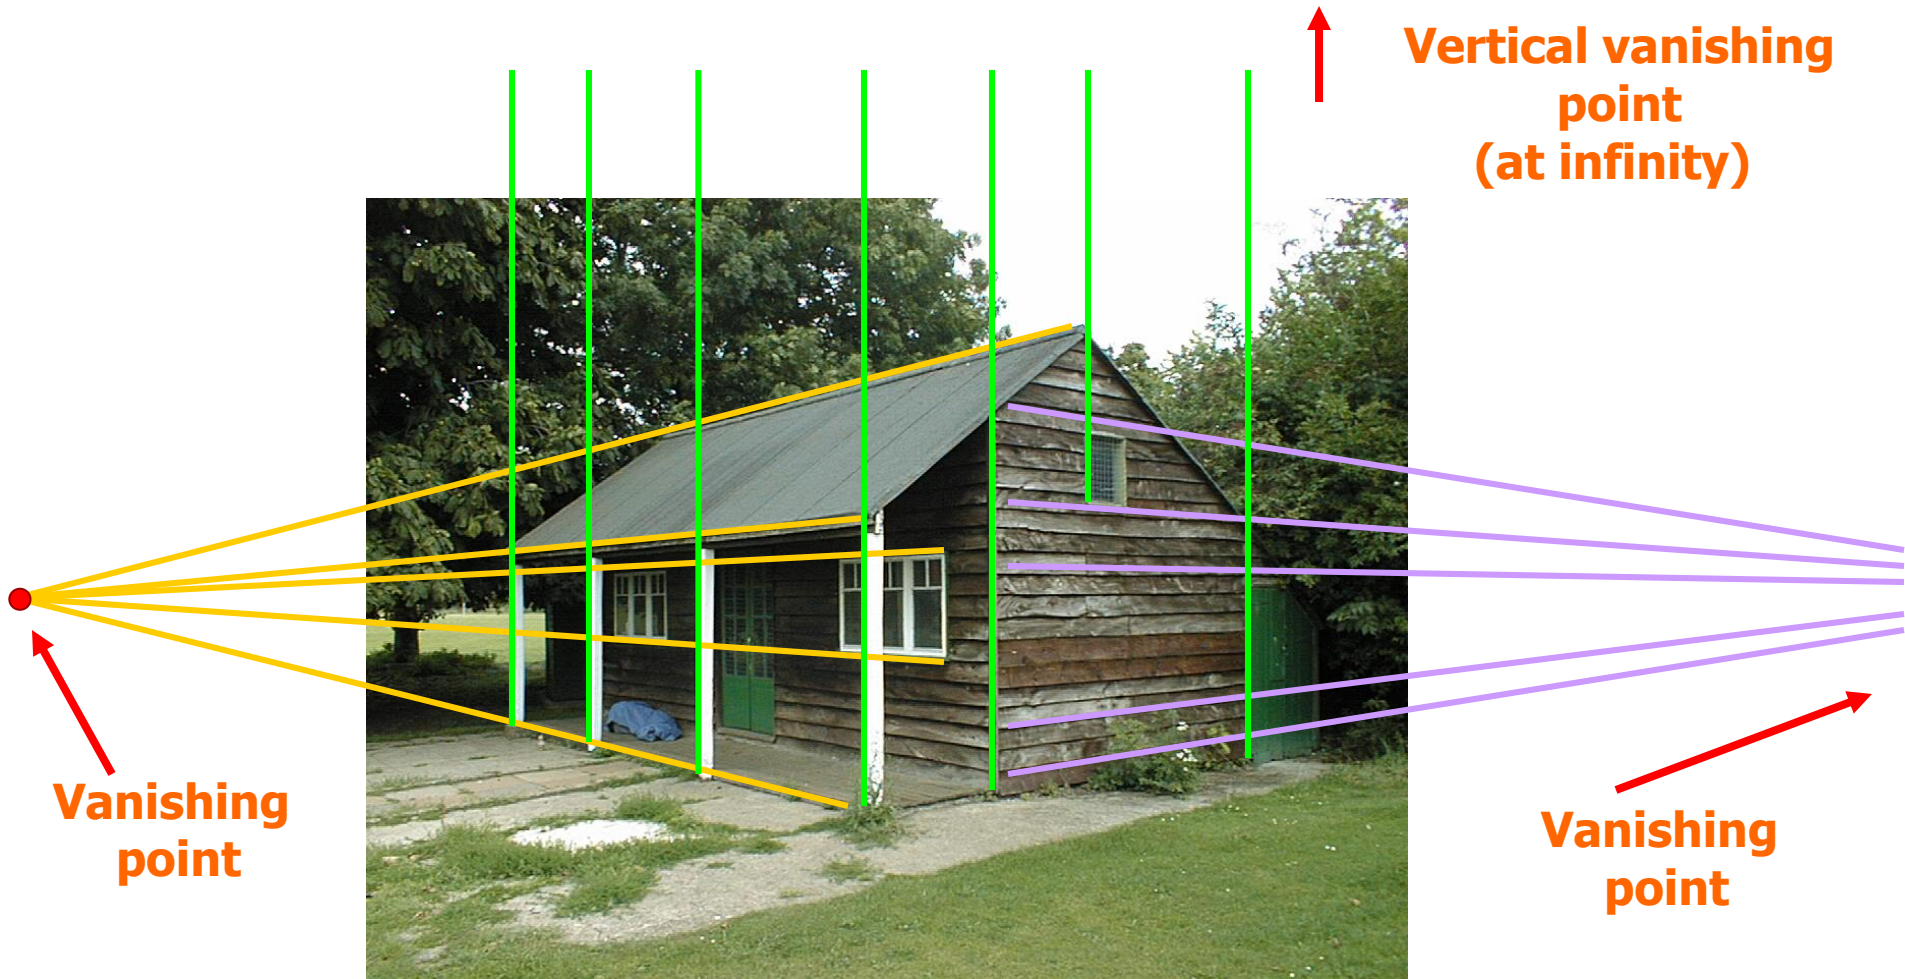



# Projection: world coordinates $\rightarrow$ image coordinates

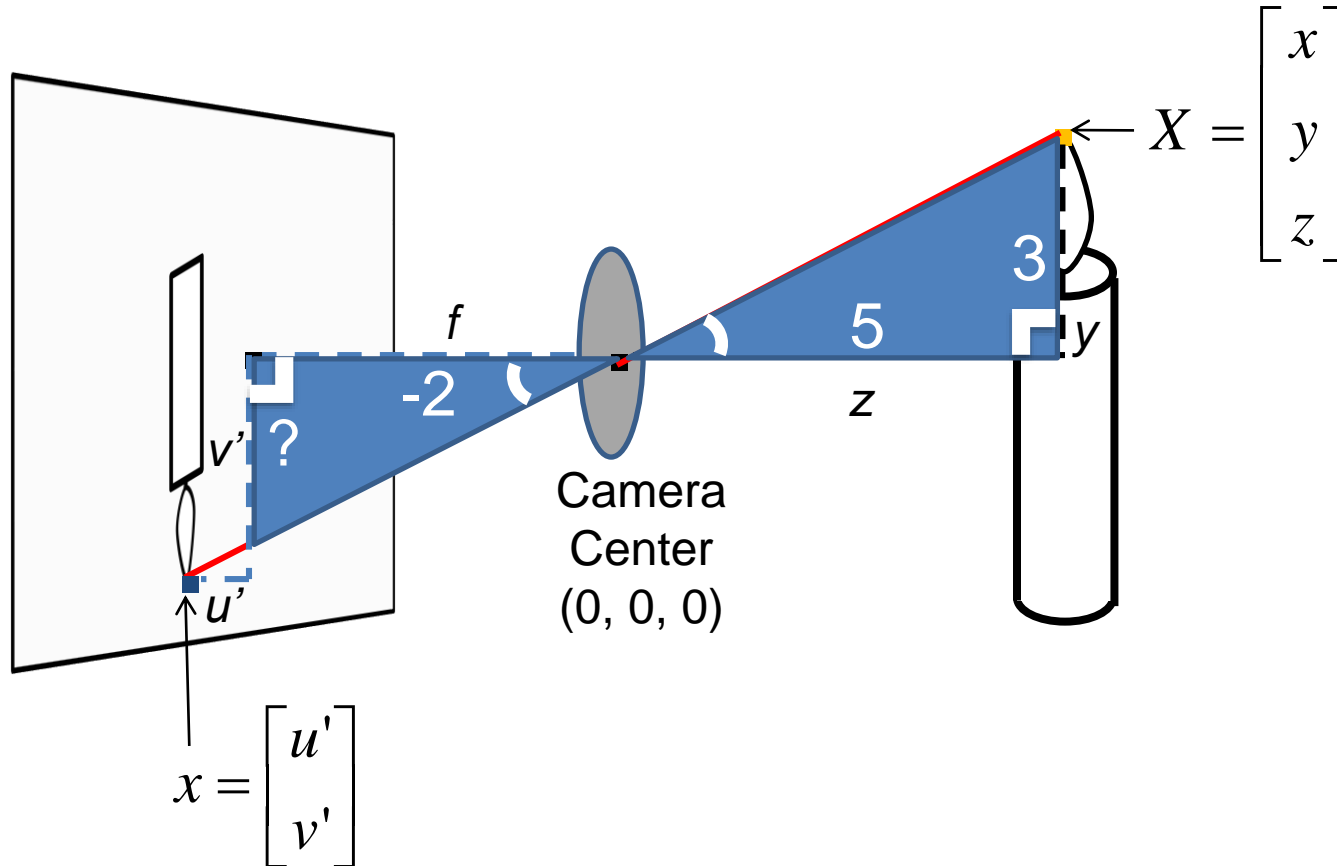

If  $X = 2, Y = 3,$   
 $Z = 5,$  and  $f = 2$   
 What are  $U$  and  $V$ ?

$$\frac{v'}{-f} = \frac{y}{z}$$


$$u' = -x * \frac{f}{z}$$

$$v' = -y * \frac{f}{z}$$

$$u' = -2 * \frac{2}{5}$$


$$v' = -3 * \frac{2}{5}$$

Projection: world coordinates  $\rightarrow$  image coordinates

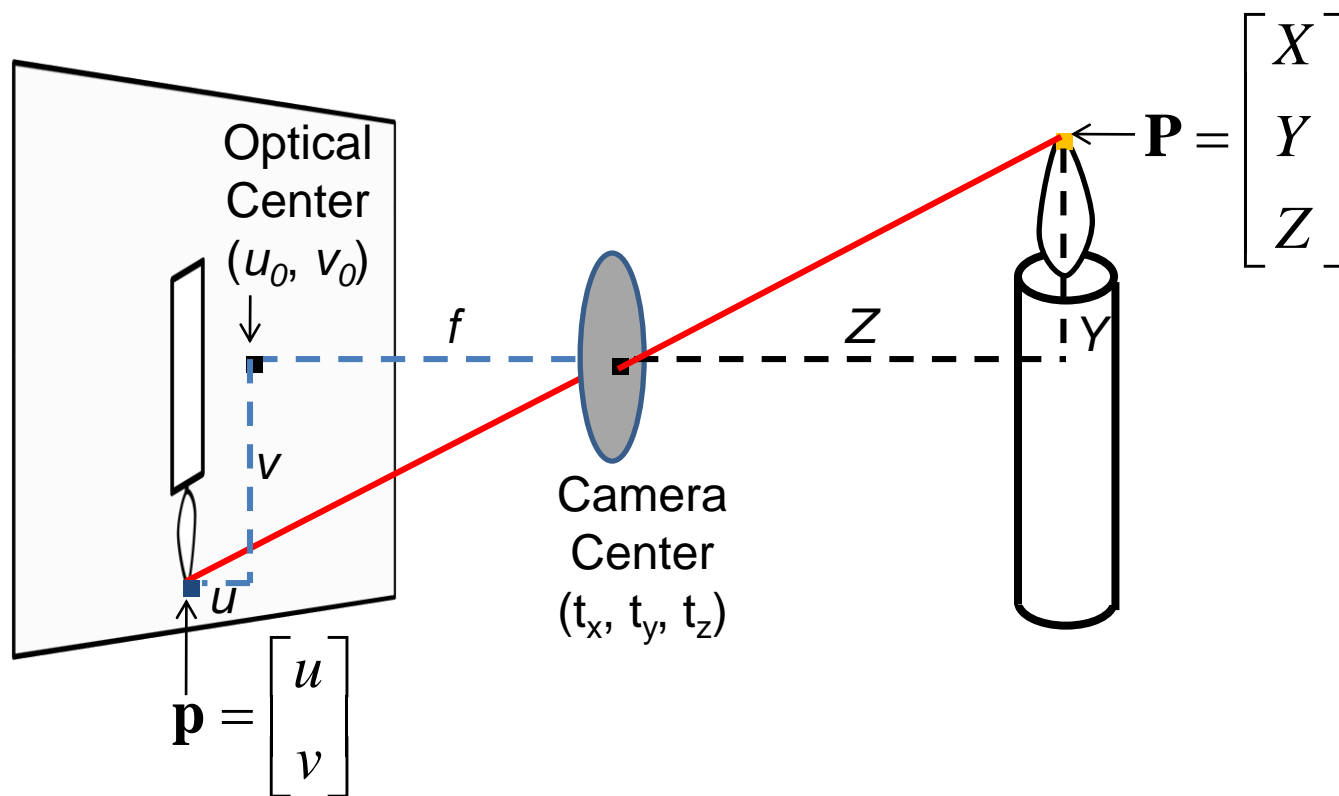

How do we handle the general case?

Projection: world coordinates  $\rightarrow$  image coordinates

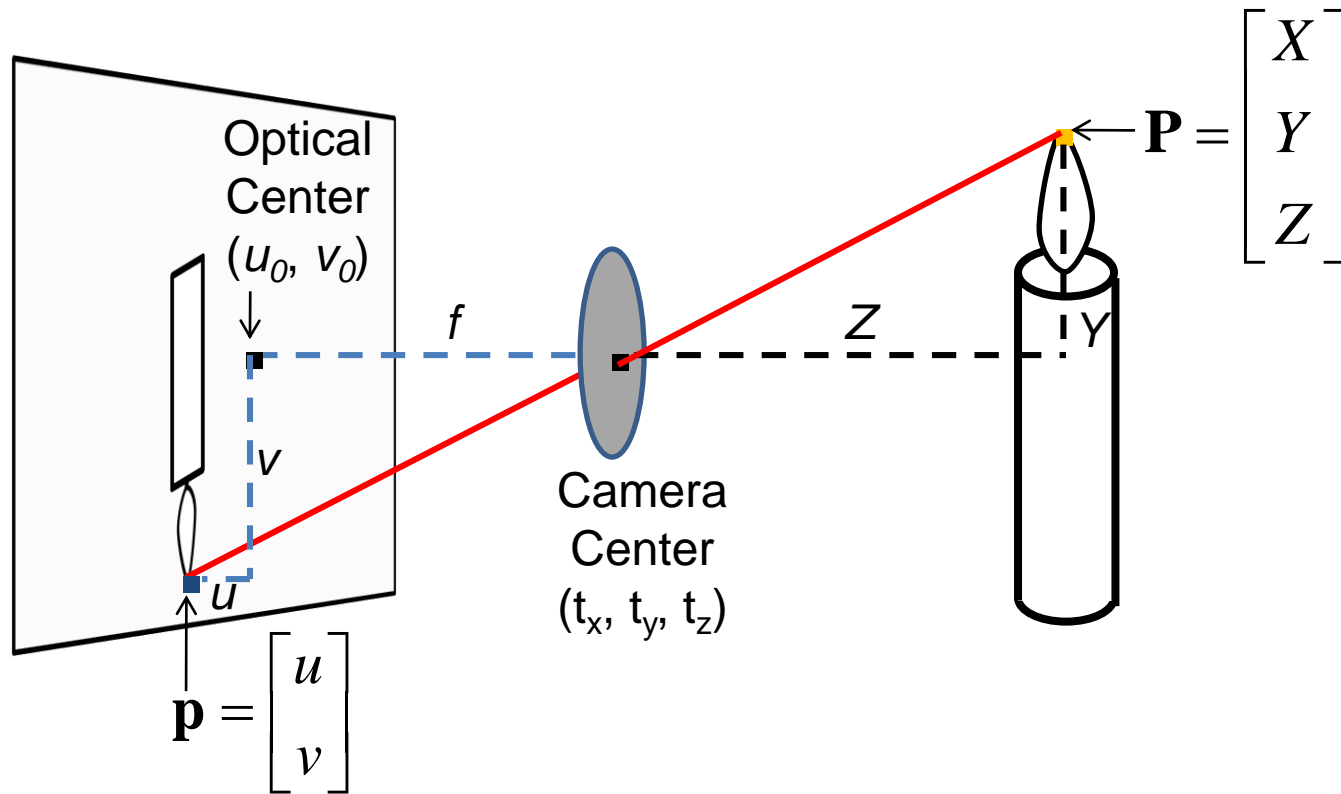

How do we handle the general case?

# Homogeneous coordinates

## Conversion

Converting to *homogeneous* coordinates

$$(x, y) \Rightarrow \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

homogeneous image  
coordinates

$$(x, y, z) \Rightarrow \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

homogeneous scene  
coordinates

Converting *from* homogeneous coordinates

$$\begin{bmatrix} x \\ y \\ w \end{bmatrix} \Rightarrow (x/w, y/w)$$

$$\begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix} \Rightarrow (x/w, y/w, z/w)$$

# Homogeneous coordinates

Invariant to scaling


$$k \begin{bmatrix} x \\ y \\ w \end{bmatrix} = \begin{bmatrix} kx \\ ky \\ kw \end{bmatrix} \Rightarrow \begin{bmatrix} \frac{kx}{kw} \\ \frac{ky}{kw} \\ \frac{kw}{kw} \end{bmatrix} = \begin{bmatrix} \frac{x}{w} \\ \frac{y}{w} \\ 1 \end{bmatrix}$$

Homogeneous  
Coordinates

Cartesian  
Coordinates

Point in Cartesian is ray in Homogeneous

# Projection matrix

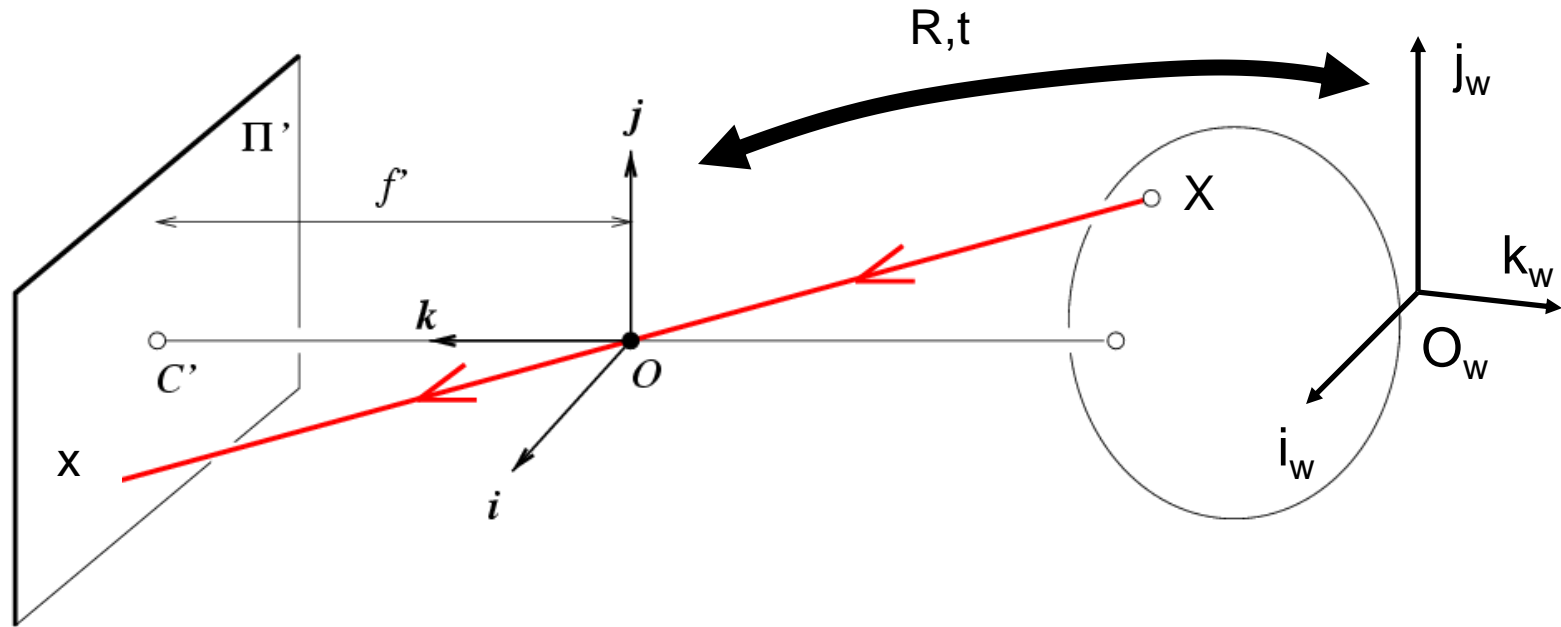

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{R} & \mathbf{t} \end{bmatrix} \mathbf{X}$$

$\mathbf{x}$ : Image Coordinates:  $(u, v, 1)$


$\mathbf{K}$ : Intrinsic Matrix  $(3 \times 3)$

$\mathbf{R}$ : Rotation  $(3 \times 3)$

$\mathbf{t}$ : Translation  $(3 \times 1)$

$\mathbf{X}$ : World Coordinates:  $(X, Y, Z, 1)$

# Projection matrix

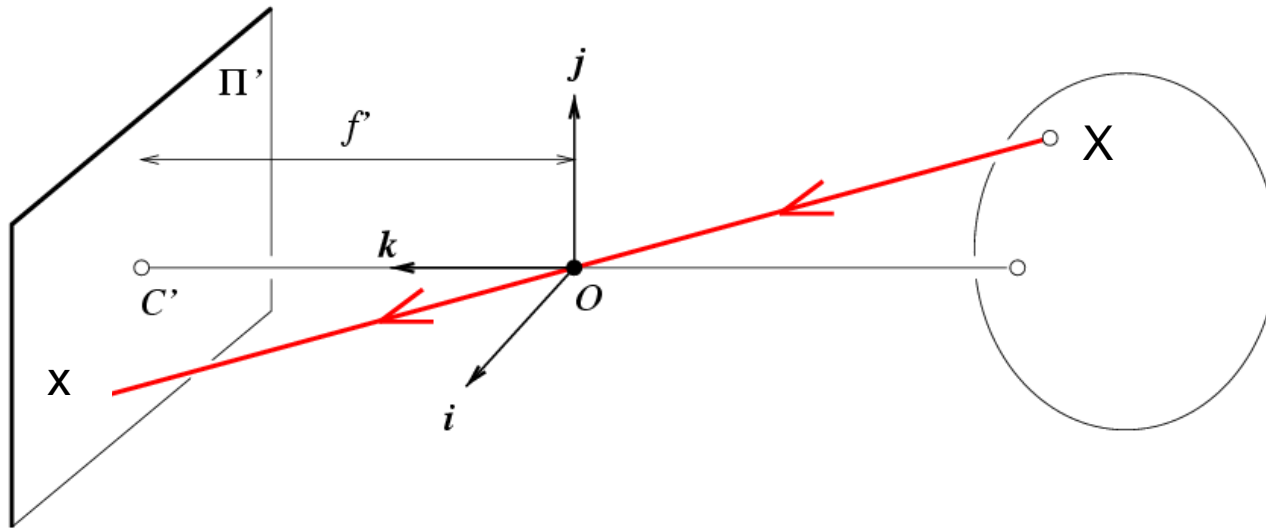

## Intrinsic Assumptions

- Unit aspect ratio
- Optical center at  $(0,0)$
- No skew


## Extrinsic Assumptions

- No rotation
- Camera at  $(0,0,0)$

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{I} & \mathbf{0} \end{bmatrix} \mathbf{X} \Rightarrow {}_w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} f & 0 & 0 & 0 \\ 0 & f & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

The matrix  $\mathbf{K}$  is indicated by a red dashed box and a red arrow pointing to the top-right corner of the matrix.

# Projection matrix

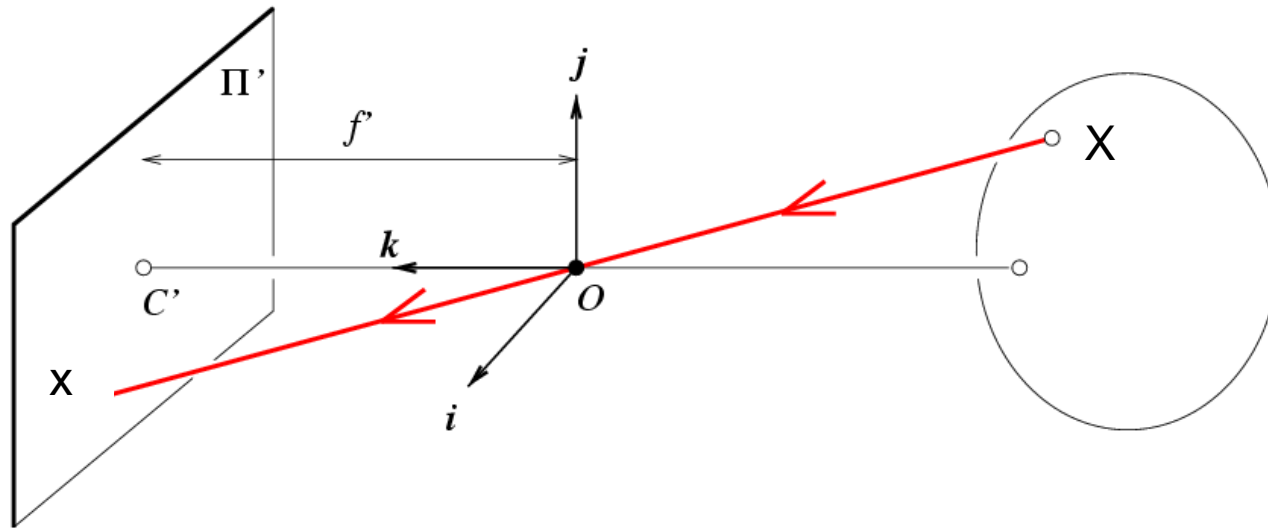

## Intrinsic Assumptions

- Unit aspect ratio
- Optical center at  $(0,0)$
- No skew

## Extrinsic Assumptions

- No rotation
- Camera at  $(0,0,0)$

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{I} & \mathbf{0} \end{bmatrix} \mathbf{X} \Rightarrow w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} f & 0 & 0 & 0 \\ 0 & f & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$



# Remove assumption: known optical center

## Intrinsic Assumptions

- Unit aspect ratio
- No skew

## Extrinsic Assumptions

- No rotation
- Camera at (0,0,0)

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{I} & \mathbf{0} \end{bmatrix} \mathbf{X} \quad \Rightarrow \quad w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} f & 0 & u_0 \\ 0 & f & v_0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

# Remove assumption: square pixels

Intrinsic Assumptions

- No skew

Extrinsic Assumptions

- No rotation
- Camera at (0,0,0)

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{I} & \mathbf{0} \end{bmatrix} \mathbf{X} \Rightarrow w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} \alpha & 0 & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

# Remove assumption: non-skewed pixels


Intrinsic Assumptions    Extrinsic Assumptions

- No rotation
- Camera at (0,0,0)

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{I} & \mathbf{0} \end{bmatrix} \mathbf{X} \Rightarrow w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Note: different books use different notation for parameters

# Oriented and Translated Camera

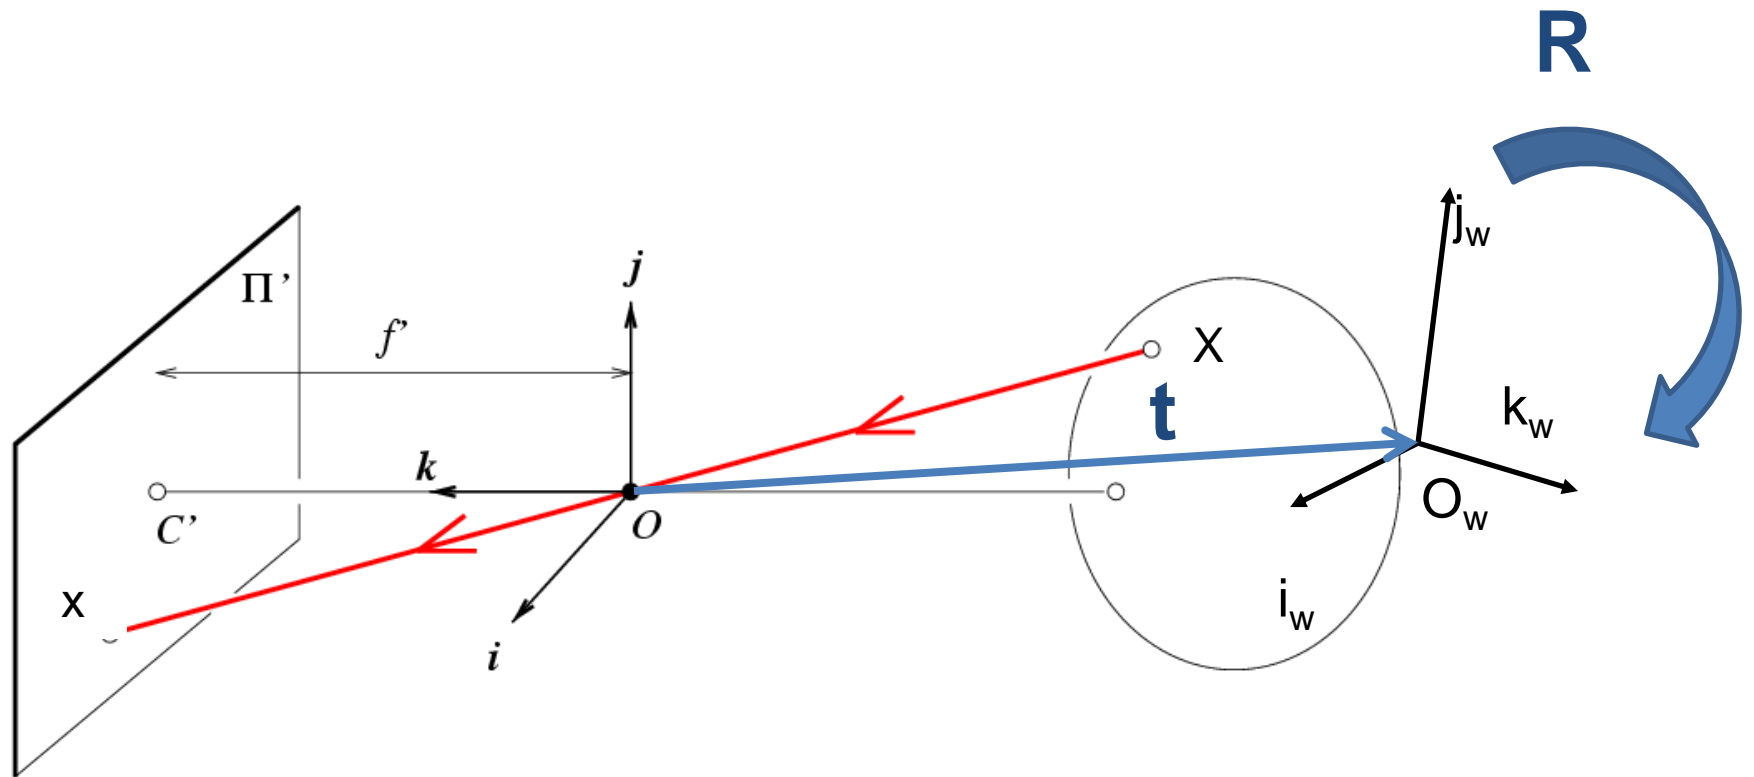

# Allow camera translation


Intrinsic Assumptions    Extrinsic Assumptions

- No rotation

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{I} & \mathbf{t} \end{bmatrix} \mathbf{X} \quad \Rightarrow \quad w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} \alpha & 0 & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

# 3D Rotation of Points

Rotation around the coordinate axes, **counter-clockwise**:

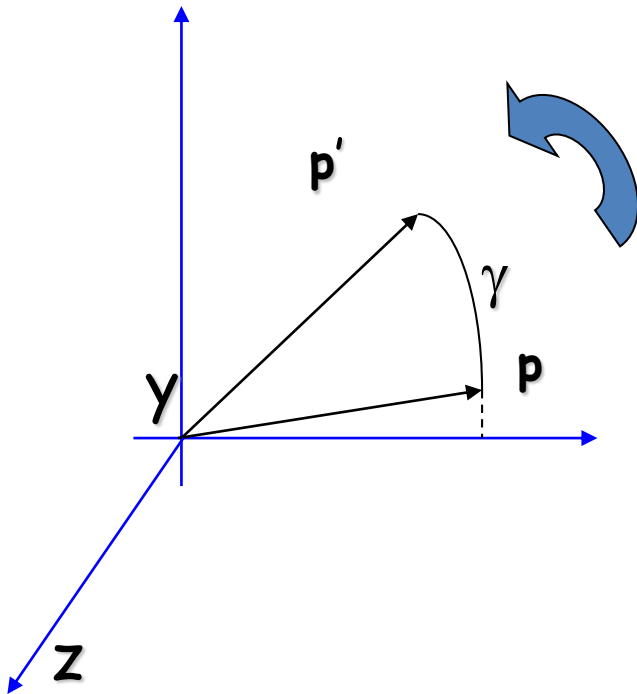

$$R_x(\alpha) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \alpha & -\sin \alpha \\ 0 & \sin \alpha & \cos \alpha \end{bmatrix}$$

$$R_y(\beta) = \begin{bmatrix} \cos \beta & 0 & \sin \beta \\ 0 & 1 & 0 \\ -\sin \beta & 0 & \cos \beta \end{bmatrix}$$

$$R_z(\gamma) = \begin{bmatrix} \cos \gamma & -\sin \gamma & 0 \\ \sin \gamma & \cos \gamma & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

# Allow camera rotation

$$\mathbf{x} = \mathbf{K}[\mathbf{R} \quad \mathbf{t}] \mathbf{X}$$



$$w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix} \begin{bmatrix} t_x \\ t_y \\ t_z \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

# Degrees of freedom


$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{R} & \mathbf{t} \end{bmatrix} \mathbf{X}$$



$$w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{matrix} 5 \\ \begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix} \end{matrix} \begin{matrix} 6 \\ \begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix} \end{matrix} \begin{matrix} \begin{bmatrix} t_x \\ t_y \\ t_z \end{bmatrix} \\ \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} \end{matrix}$$



# Field of View (Zoom, focal length)

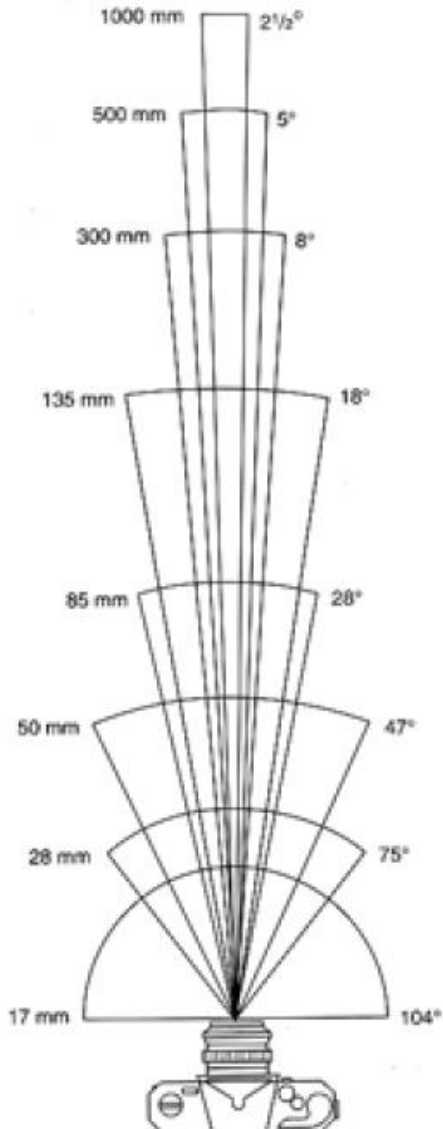

17mm



28mm




50mm




85mm


**From London and Upton**

# Beyond Pinholes: Radial Distortion

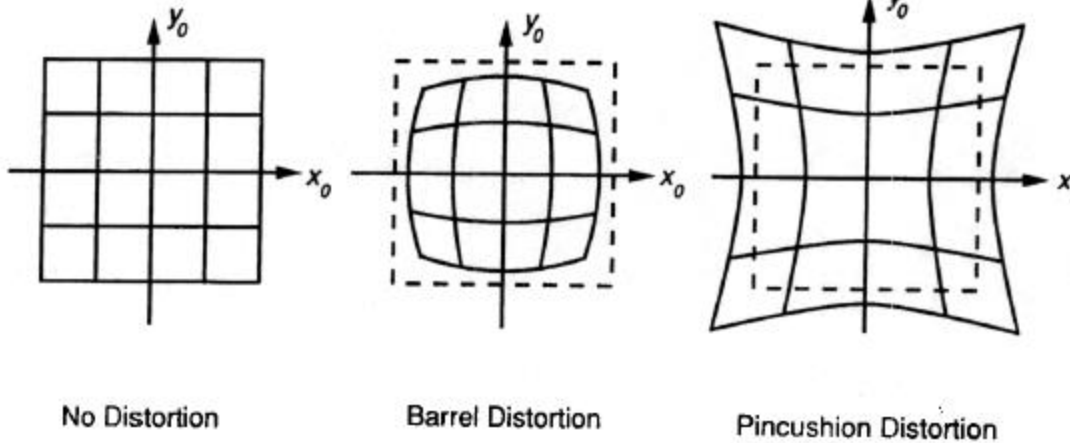


Corrected Barrel Distortion

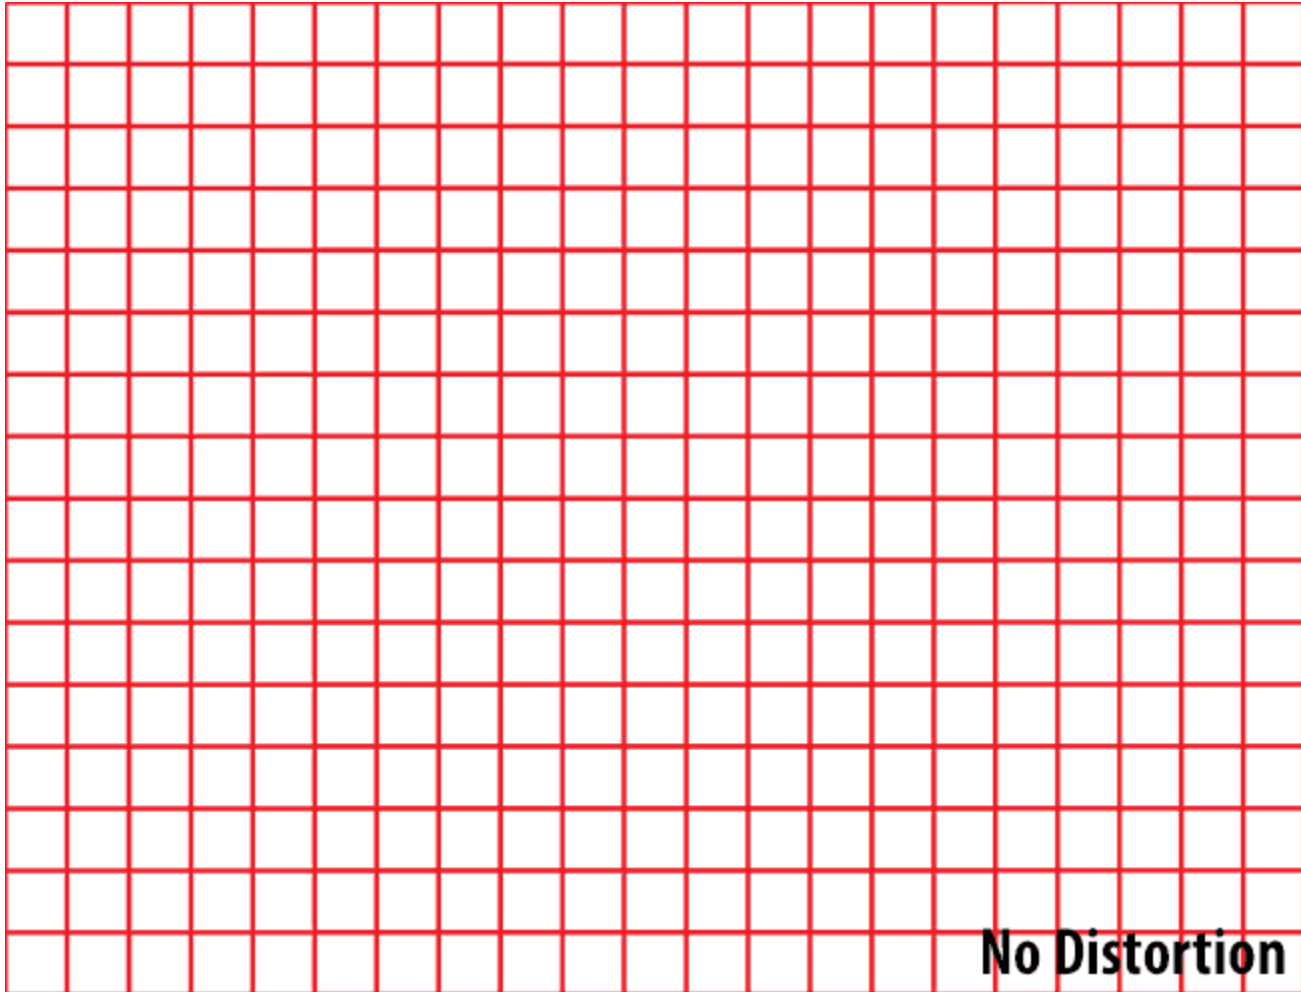


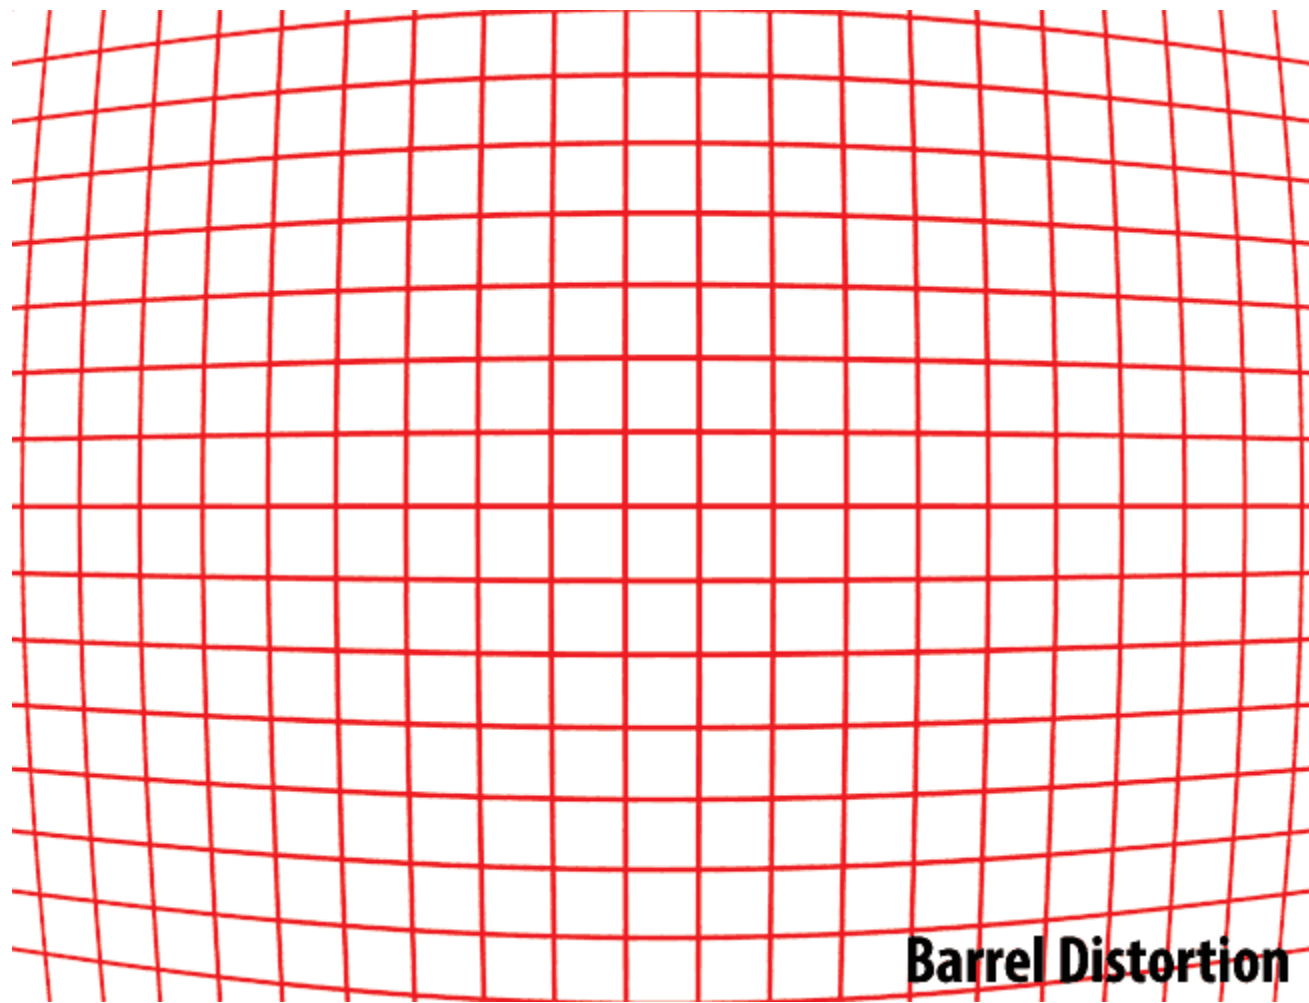

**Barrel Distortion**

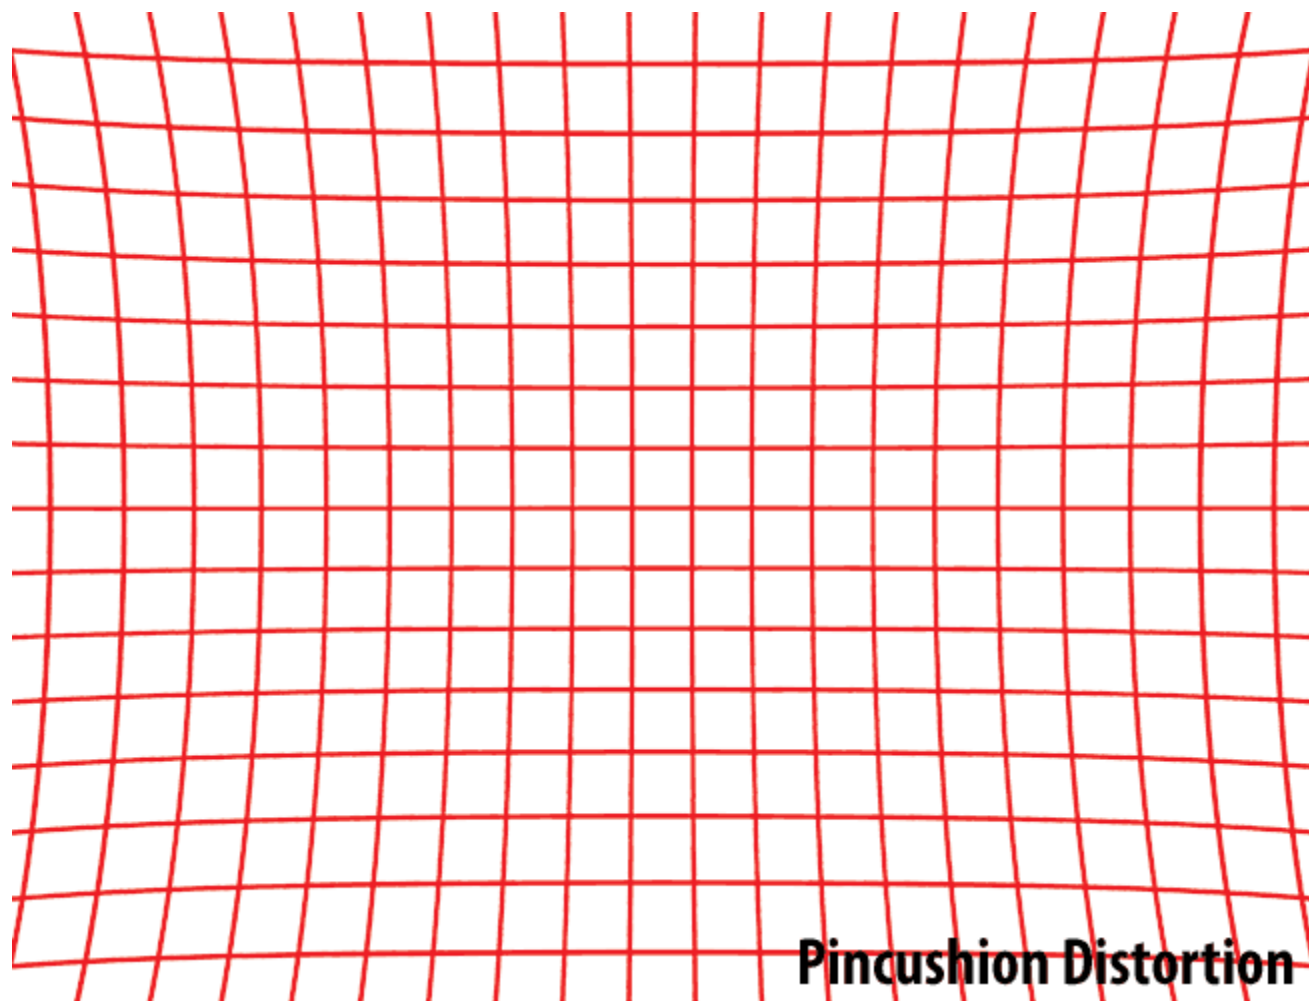

**Pincushion Distortion**

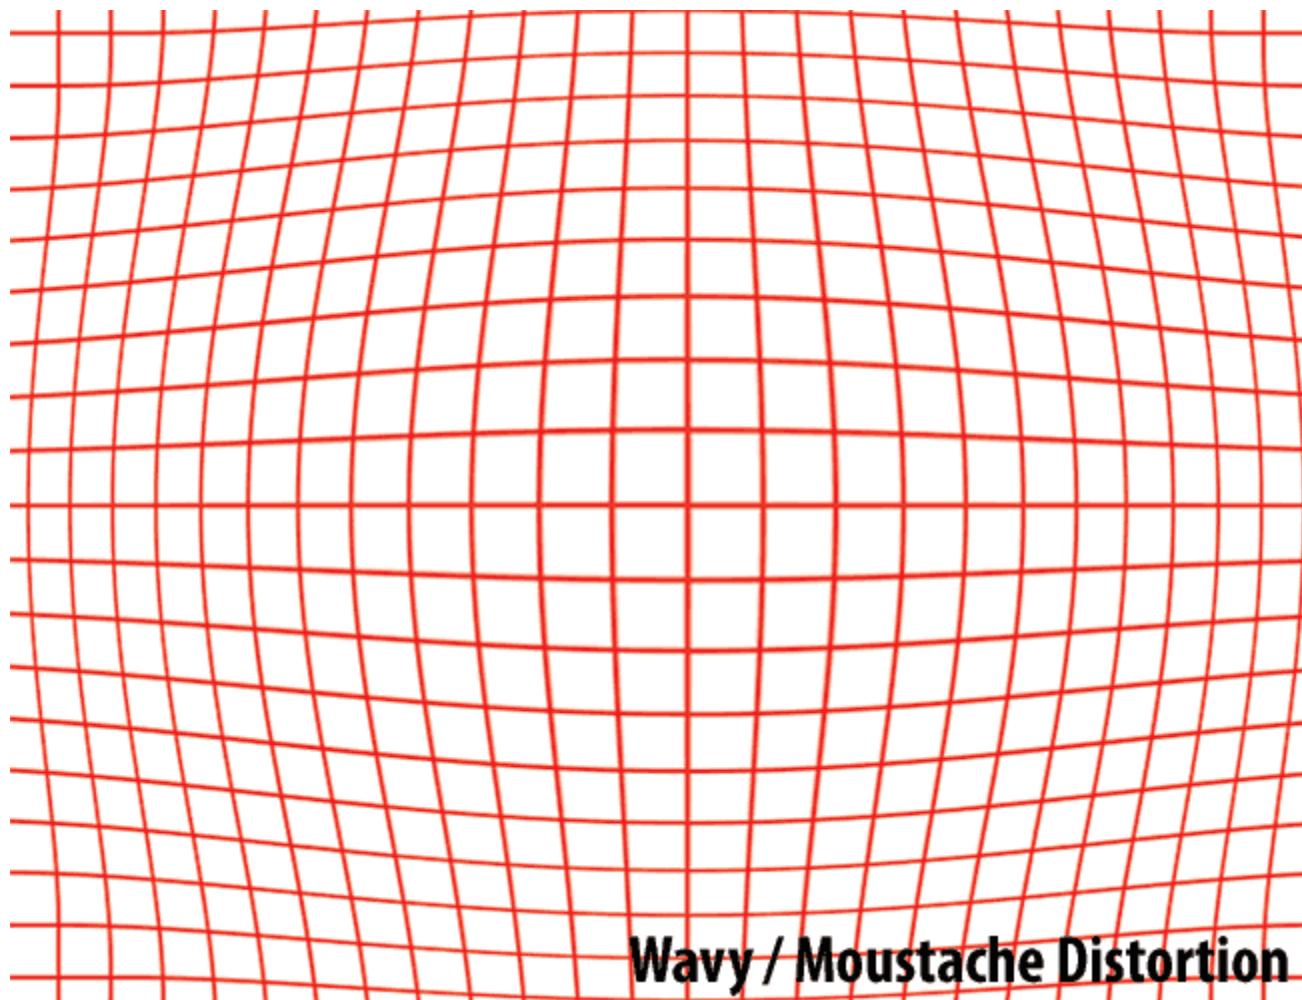

**Wavy / Moustache Distortion**

# Software Correction of Lens Distortions

$$\begin{aligned}x_u &= x_d + (x_d - x_c)(K_1 r^2 + K_2 r^4 + \dots) + (P_1(r^2 + 2(x_d - x_c)^2) + 2P_2(x_d - x_c)(y_d - y_c))(1 + P_3 r^2 + P_4 r^4 \dots) \\y_u &= y_d + (y_d - y_c)(K_1 r^2 + K_2 r^4 + \dots) + (2P_1(x_d - x_c)(y_d - y_c) + P_2(r^2 + 2(y_d - y_c)^2))(1 + P_3 r^2 + P_4 r^4 \dots),\end{aligned}$$

where:

$(x_d, y_d)$  = distorted image point as projected on image plane using specified lens,

$(x_u, y_u)$  = undistorted image point as projected by an ideal [pinhole camera](#),

$(x_c, y_c)$  = distortion center,

$K_n = n^{\text{th}}$  radial distortion coefficient,

$P_n = n^{\text{th}}$  tangential distortion coefficient,


$r = \sqrt{(x_d - x_c)^2 + (y_d - y_c)^2}$ , and

... = an infinite series.


$$\begin{aligned}x_u &= x_c + \frac{x_d - x_c}{1 + K_1 r^2 + K_2 r^4 + \dots} \\y_u &= y_c + \frac{y_d - y_c}{1 + K_1 r^2 + K_2 r^4 + \dots},\end{aligned}$$

# Things to remember

- Vanishing points and vanishing lines

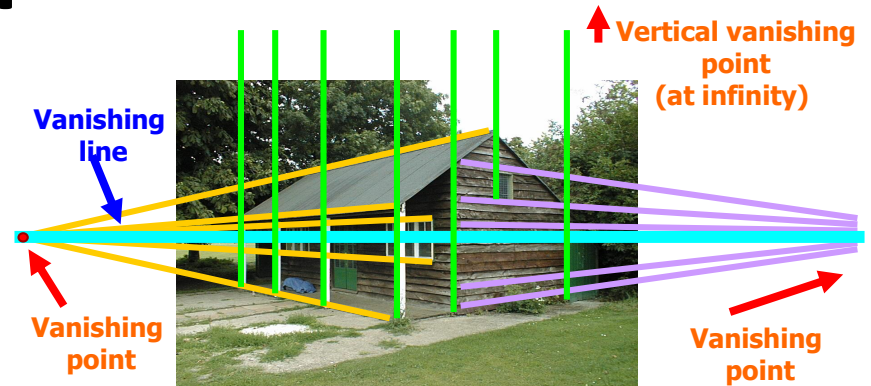

- Pinhole camera model and camera projection matrix

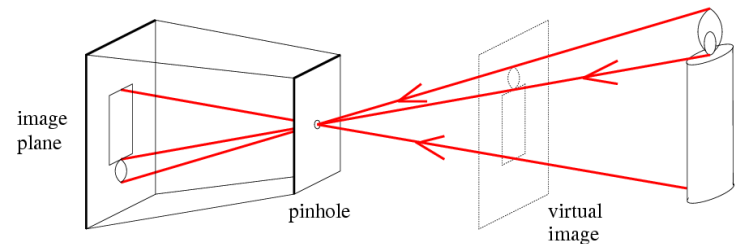

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{R} & \mathbf{t} \end{bmatrix} \mathbf{X}$$

- Homogeneous coordinates

$$(x, y) \Rightarrow \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$



# Things to remember



## Degrees of freedom

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{R} & \mathbf{t} \end{bmatrix} \mathbf{X}$$




$$w \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \begin{matrix} 5 \\ \begin{bmatrix} \alpha & s & u_0 \\ 0 & \beta & v_0 \\ 0 & 0 & 1 \end{bmatrix} \end{matrix} \begin{matrix} 6 \\ \begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix} \end{matrix} \begin{bmatrix} t_x \\ t_y \\ t_z \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

# Image Formation

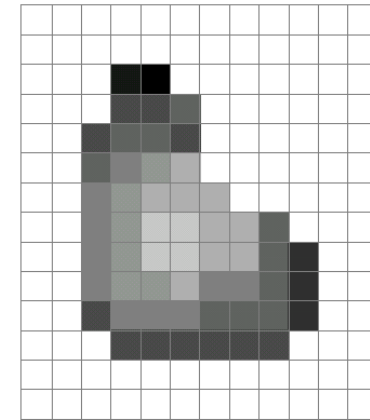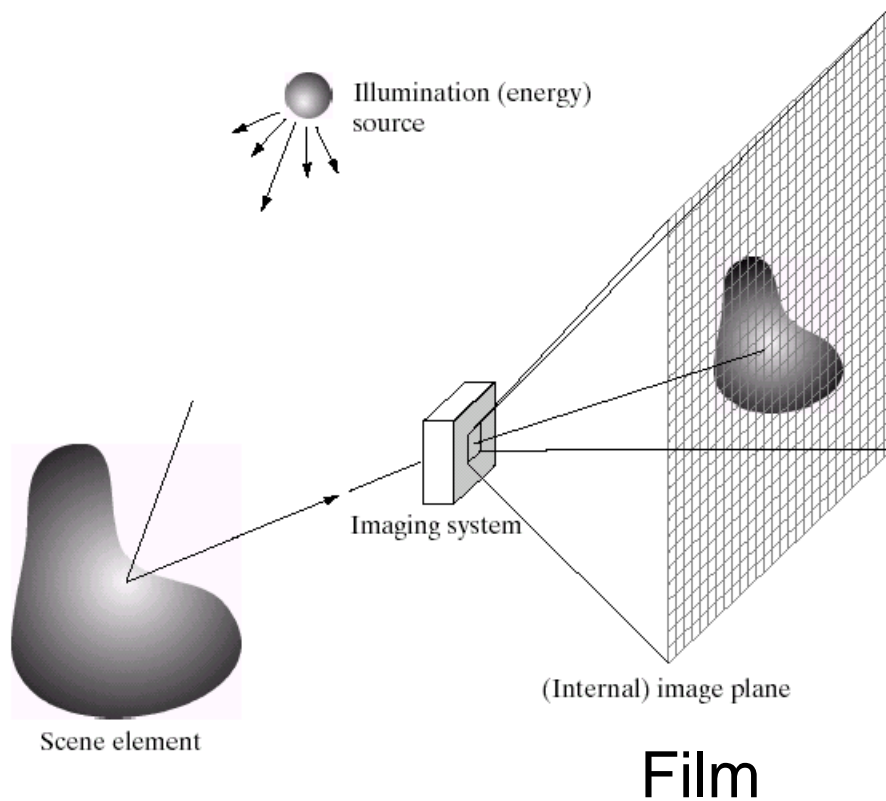


Digital Camera

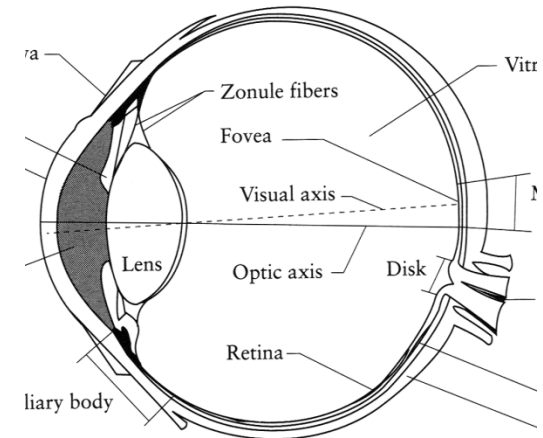

The Eye


# A photon's life choices

- Absorption
- Diffusion
- Reflection
- Transparency
- Refraction
- Fluorescence
- Subsurface scattering
- Phosphorescence
- Interreflection

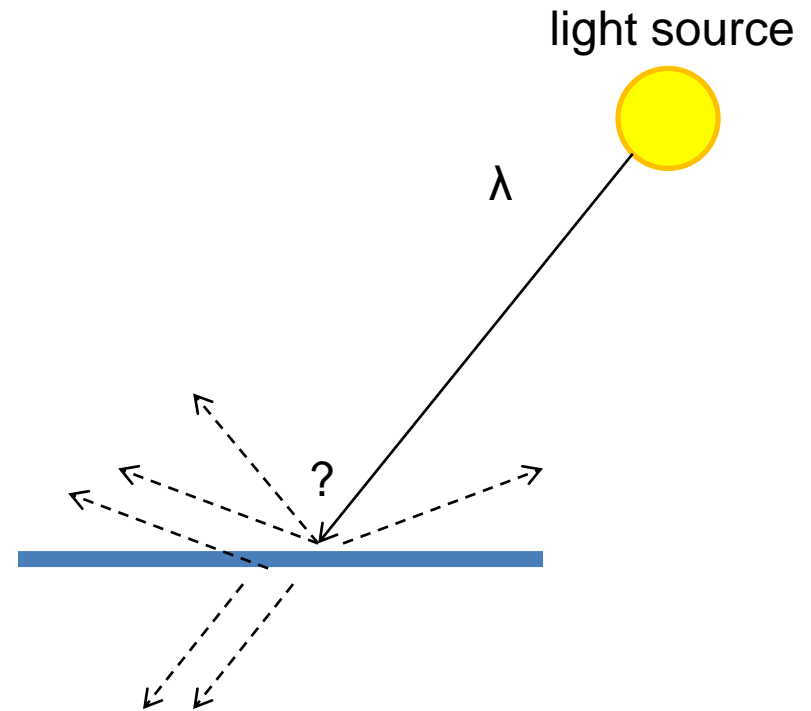


# A photon's life choices

- **Absorption**
- Diffusion
- Reflection
- Transparency
- Refraction
- Fluorescence
- Subsurface scattering
- Phosphorescence
- Interreflection

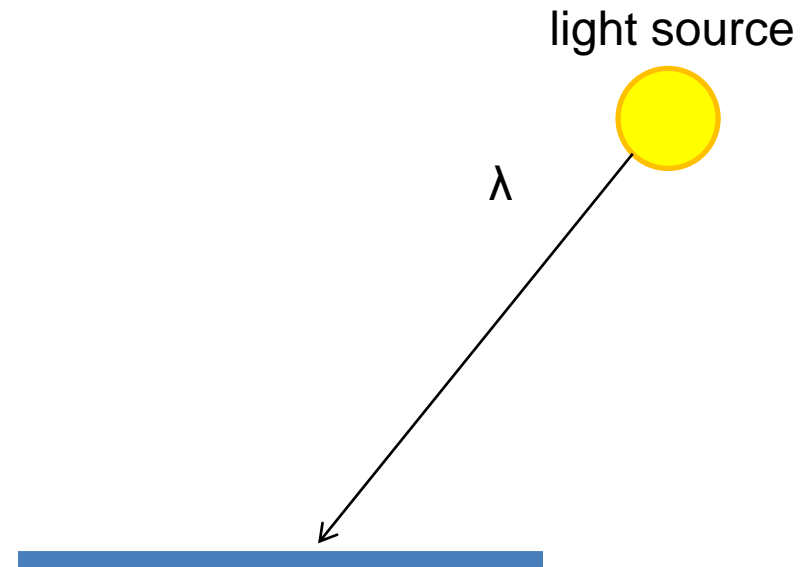


# A photon's life choices

- Absorption
- **Diffuse Reflection**
- Reflection
- Transparency
- Refraction
- Fluorescence
- Subsurface scattering
- Phosphorescence
- Interreflection

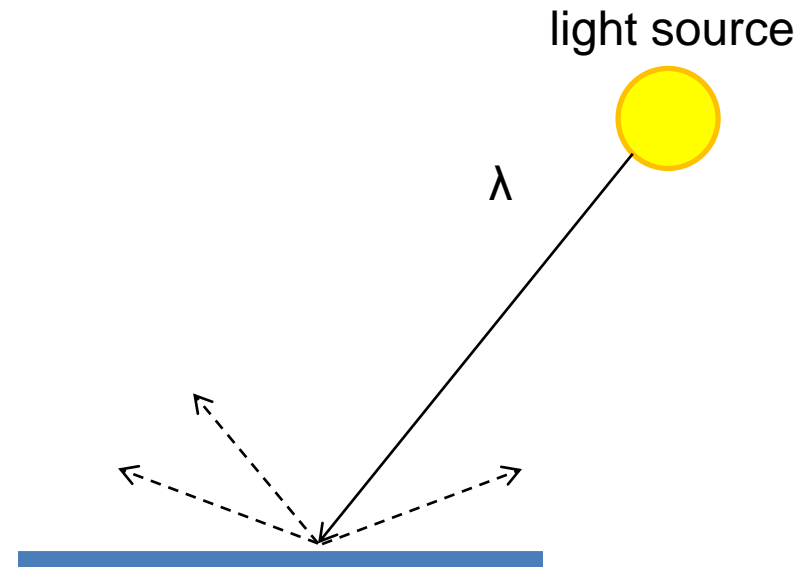


# A photon's life choices

- Absorption
- Diffusion
- **Specular Reflection**
- Transparency
- Refraction
- Fluorescence
- Subsurface scattering
- Phosphorescence
- Interreflection

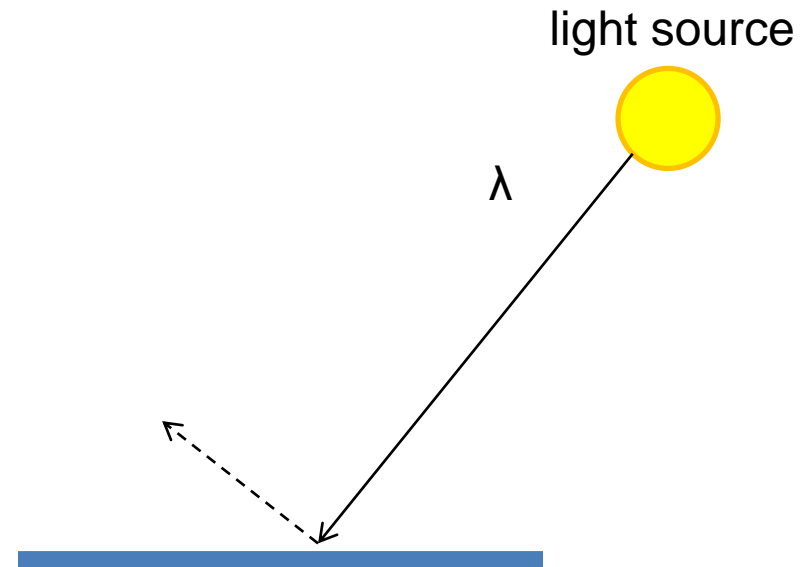


# A photon's life choices

- Absorption
- Diffusion
- Reflection
- **Transparency**
- Refraction
- Fluorescence
- Subsurface scattering
- Phosphorescence
- Interreflection

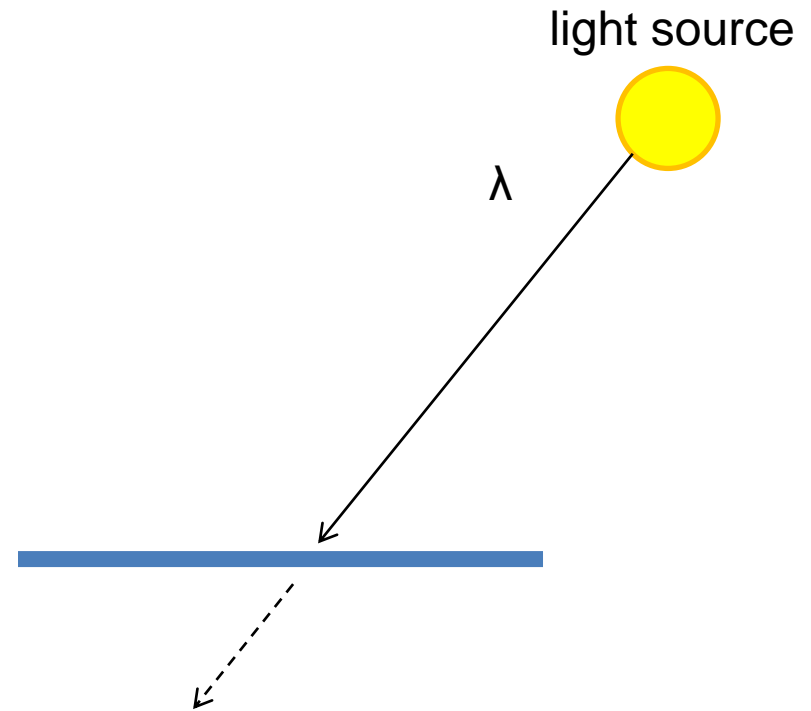

# A photon's life choices


- Absorption
- Diffusion
- Reflection
- Transparency
- **Refraction**
- Fluorescence
- Subsurface scattering
- Phosphorescence
- Interreflection

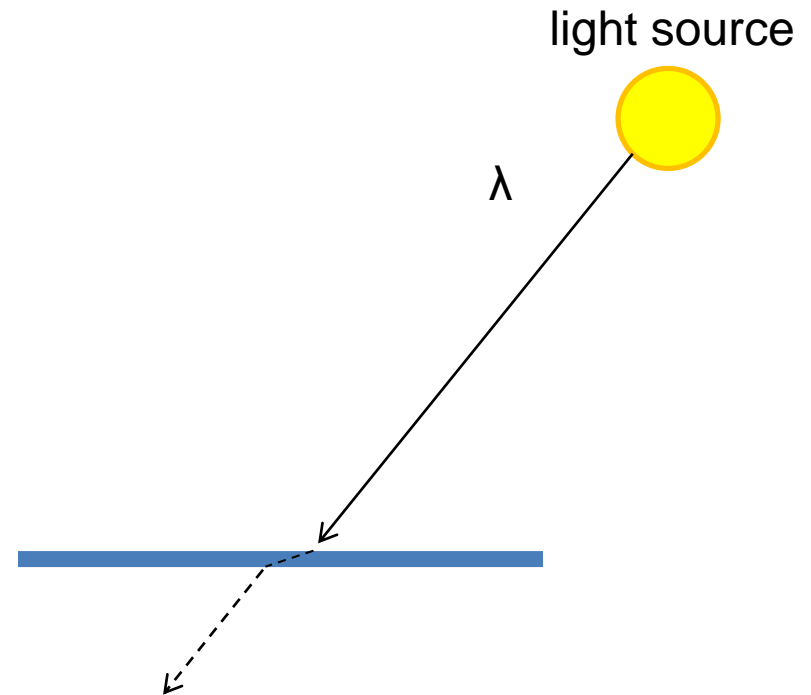




# A photon's life choices

- Absorption
- Diffusion
- Reflection
- Transparency
- Refraction
- **Fluorescence**
- Subsurface scattering
- Phosphorescence
- Interreflection

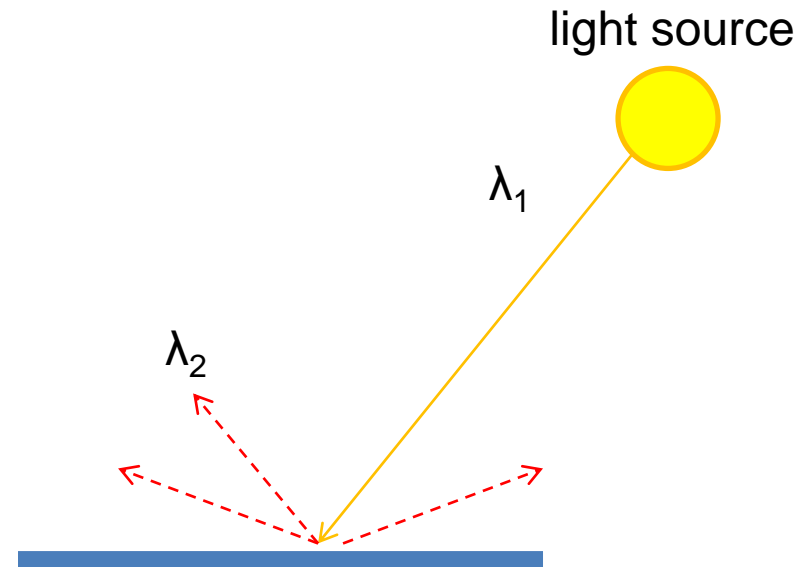


# A photon's life choices

- Absorption
- Diffusion
- Reflection
- Transparency
- Refraction
- Fluorescence
- **Subsurface scattering**
- Phosphorescence
- Interreflection

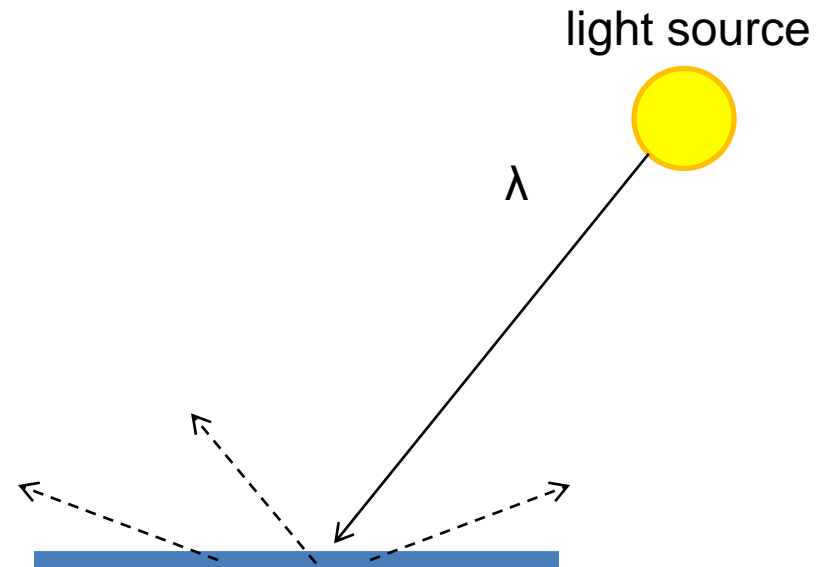


# A photon's life choices

- Absorption
- Diffusion
- Reflection
- Transparency
- Refraction
- Fluorescence
- Subsurface scattering
- **Phosphorescence**
- Interreflection

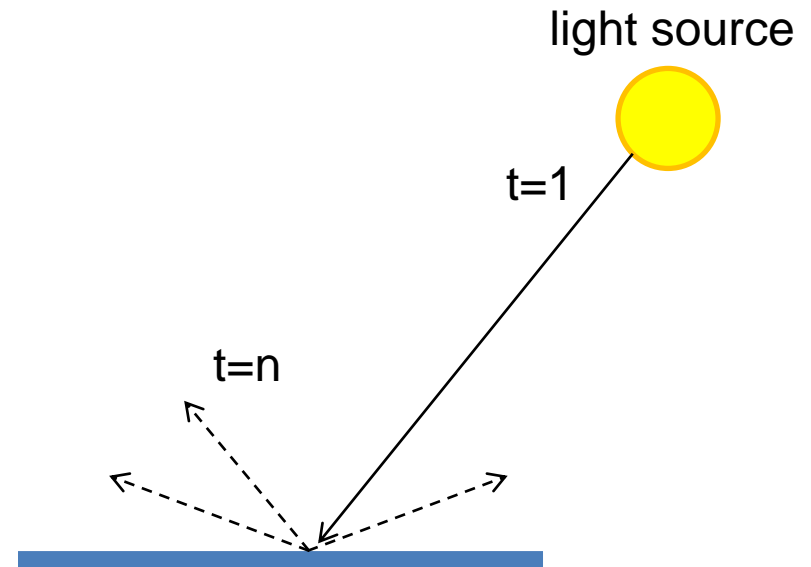

# A photon's life choices

- Absorption
- Diffusion
- Reflection
- Transparency
- Refraction
- Fluorescence
- Subsurface scattering
- Phosphorescence
- **Interreflection**

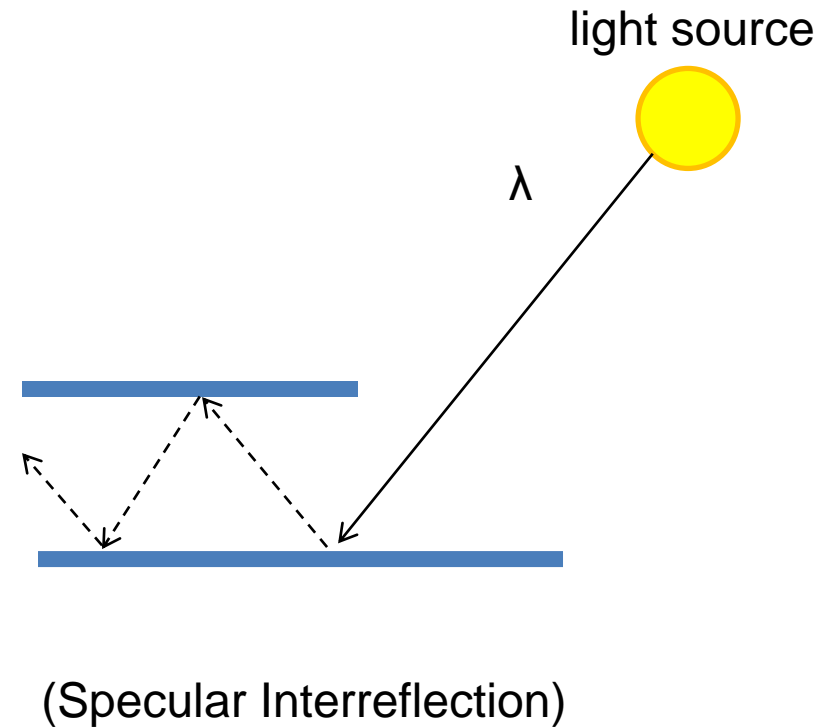

# Lambertian Reflectance


- In computer vision, surfaces are often assumed to be ideal diffuse reflectors with no dependence on viewing direction.

# Digital camera



- A digital camera replaces film with a sensor array
  - Each cell in the array is light-sensitive diode that converts photons to electrons
  - Two common types
    - Charge Coupled Device (CCD)
    - CMOS
  - <http://electronics.howstuffworks.com/digital-camera.htm>

# Sensor Array

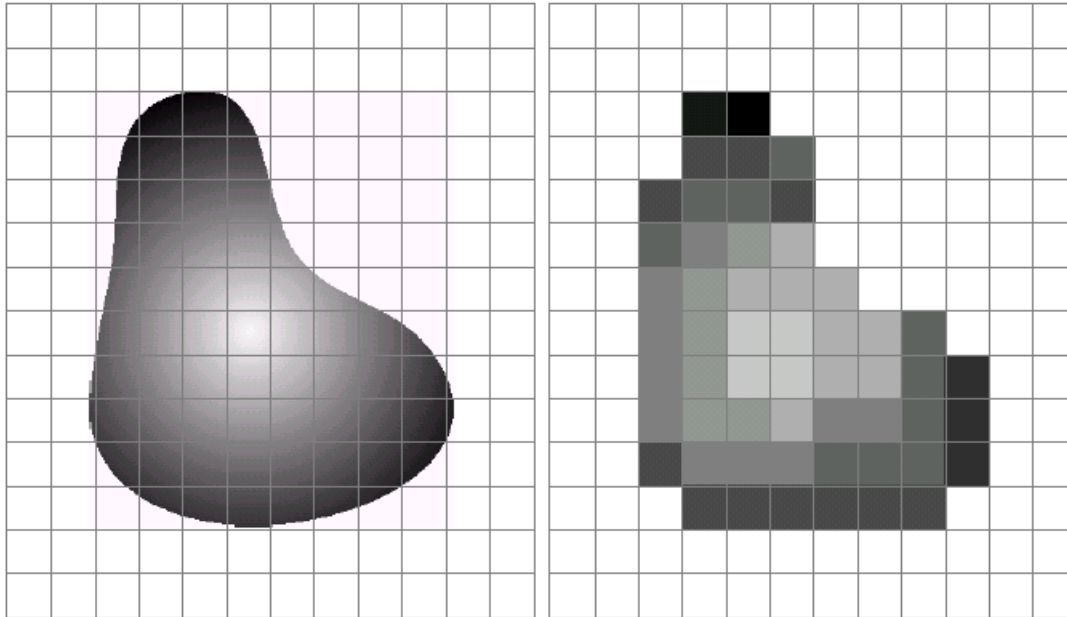

a b


**FIGURE 2.17** (a) Continuous image projected onto a sensor array. (b) Result of image sampling and quantization.

---



CMOS sensor


# Sampling and Quantization

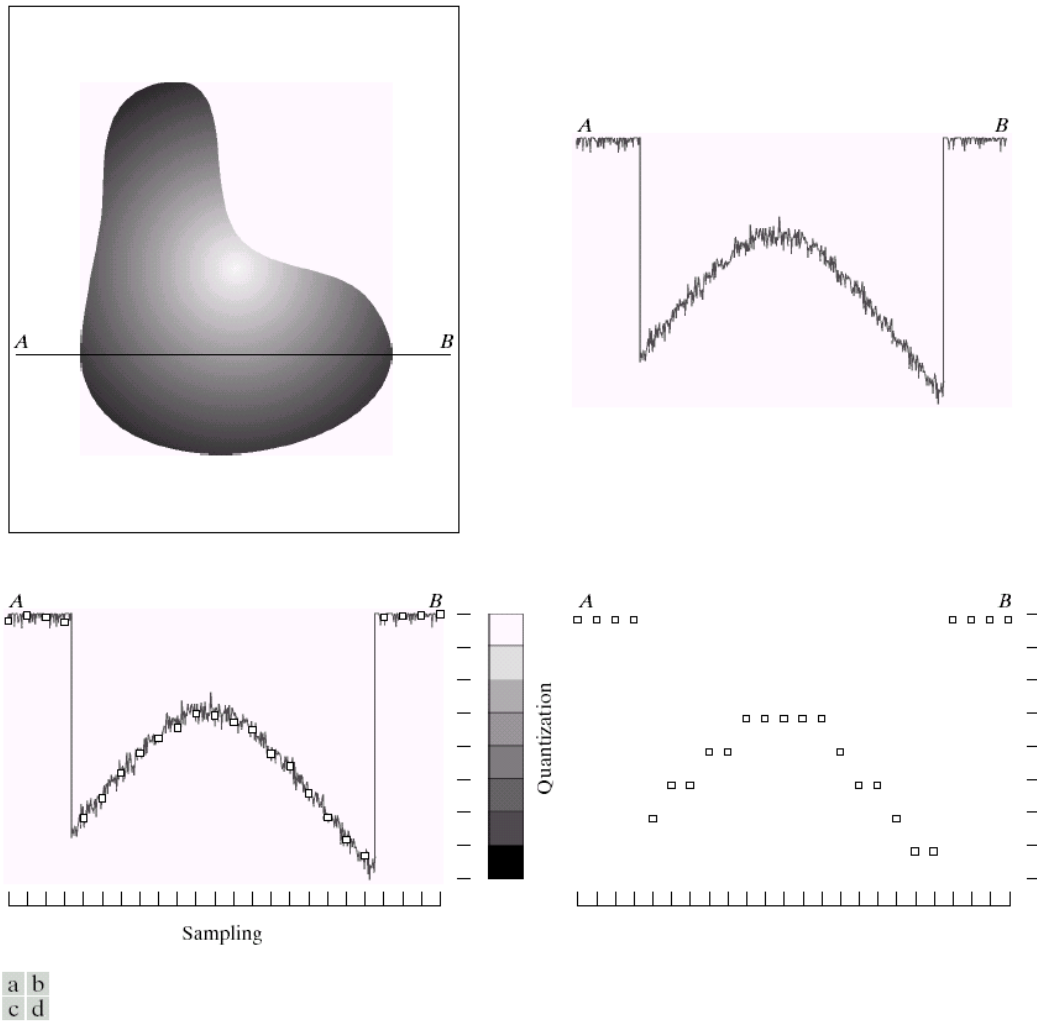

**FIGURE 2.16** Generating a digital image. (a) Continuous image. (b) A scan line from *A* to *B* in the continuous image, used to illustrate the concepts of sampling and quantization. (c) Sampling and quantization. (d) Digital scan line.



# The Eye

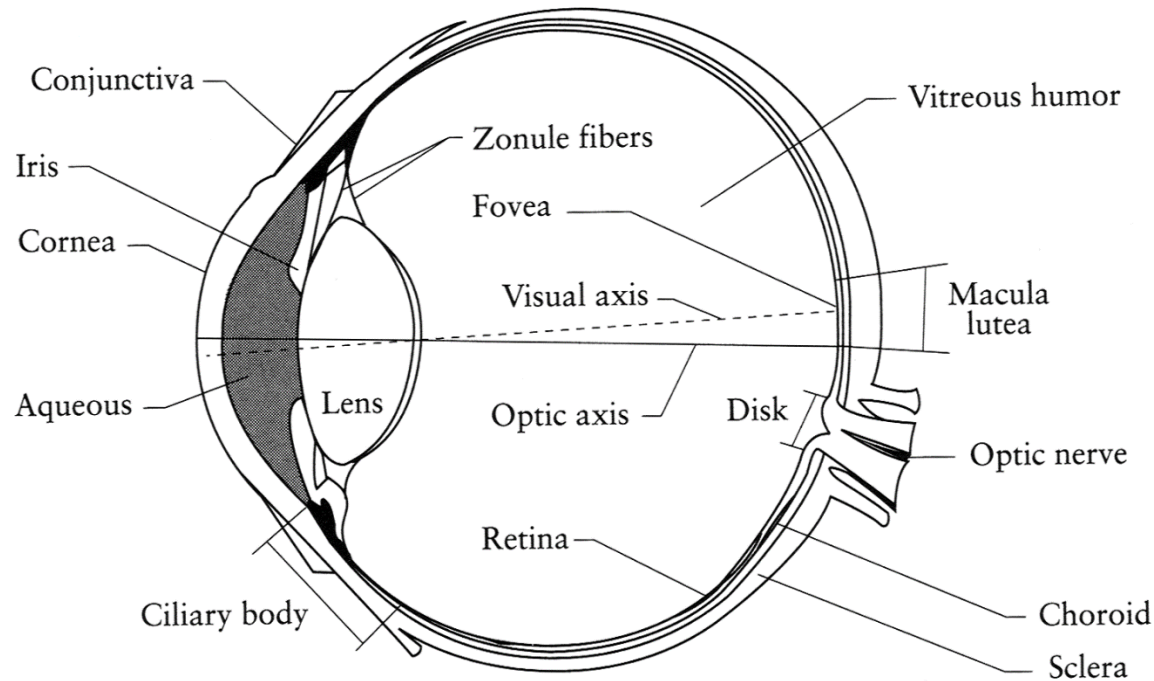


- The human eye is a camera!
  - **Iris** - colored annulus with radial muscles
  - **Pupil** - the hole (aperture) whose size is controlled by the iris
  - What's the "film"?
    - photoreceptor cells (rods and cones) in the **retina**


# Why do we care about human vision?

- We don't, necessarily.
- But cameras necessarily imitate the frequency response of the human eye, so we should know that much.
- Also, computer vision probably wouldn't get as much scrutiny if biological vision (especially human vision) hadn't proved that it was possible to make important judgements from 2d images.

# Rod / Cone sensitivity

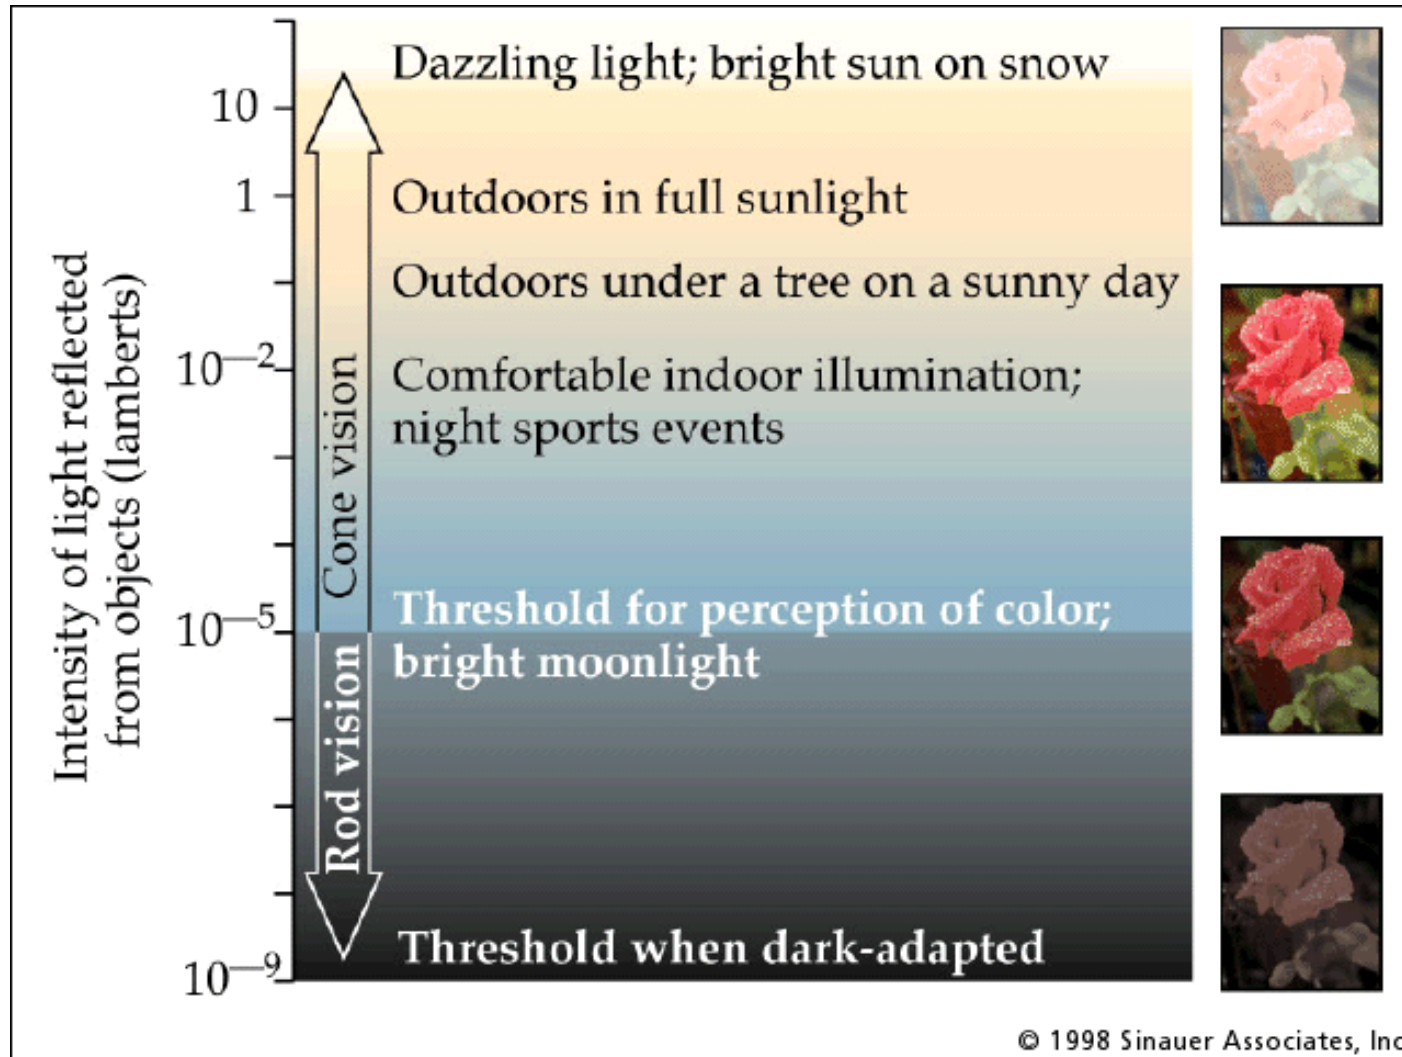

# Distribution of Rods and Cones

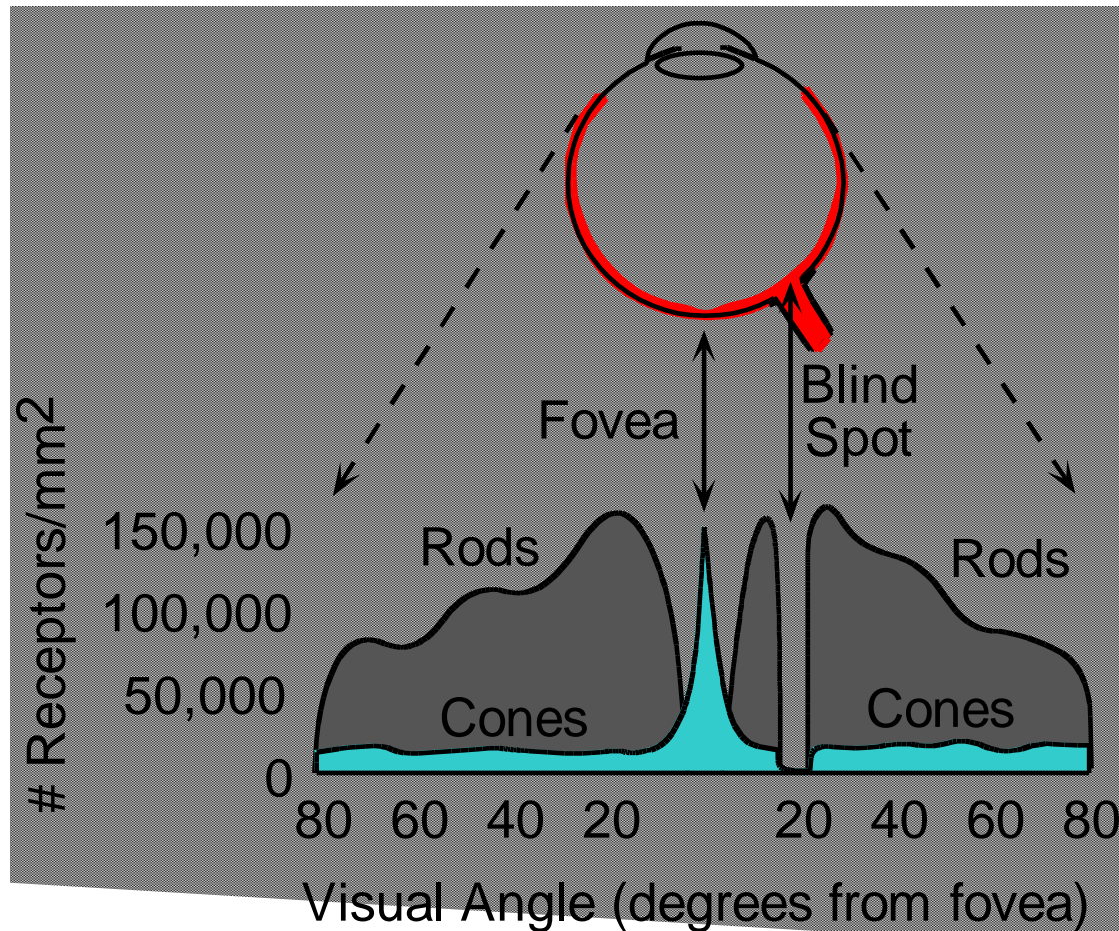

Night Sky: why are there more stars off-center?

Averted vision: [http://en.wikipedia.org/wiki/Averted\\_vision](http://en.wikipedia.org/wiki/Averted_vision)