

# Minimum Power Assignment in Wireless Ad Hoc Networks with Spanner Property

Yu Wang\*    Xiang-Yang Li\*

*Abstract*—Power assignment for wireless networks is to assign a power for each wireless node such that the induced communication graph has some required properties. In this paper, we study the power assignment such that the induced communication graph is a spanner for the original communication graph when all nodes have the maximum power. Polynomial time algorithm is given to minimize the maximum assigned power. Then we propose a new polynomial time approximation method to minimize the total transmission radius of all nodes. We also give two heuristics and conduct extensive simulations to study their performance when we want to minimize the total assigned power of all nodes. Our simulations validate our theoretical claims.

*Keywords*—Power assignment, spanner, wireless ad hoc networks.

## I. INTRODUCTION

In this paper, we address the problem of finding minimum power assignment in wireless ad hoc networks such that the induced communication graph is a spanner of the communication graph when all nodes transmit at their maximum power. In a wireless network, each wireless node has an omni-directional antenna and a single transmission of a node can be received by any node within its vicinity which, we assume, is a disk centered at this node. A wireless node can receive the signal from another node if it is within the transmission range of the sender. Otherwise, they communicate through multi-hop wireless links by using intermediate nodes to relay the message. Generally, nodes in an ad-hoc network are mobile as well, but in this paper we are primarily concerned with relatively static nodes. Energy conservation is a critical issue in *ad hoc* wireless network for the node and network life, as the nodes are powered by small batteries only. Thus research efforts have focused on designing minimum-power-assignment algorithms for typical network tasks such as broadcast transmission [1], [2], [3], [4], routing [5], connectivity [6], [7], [8], [9], [10], and fault-tolerance [11], [12], [13].

We consider a set  $V = \{v_1, v_2, \dots, v_n\}$  of  $n$  wireless nodes (e.g., students on a campus) distributed in a two dimensional plane. We assume that the power  $w_{uv}$  needed to support the communication between two nodes  $u$  and  $v$  is a monotone increasing function of the Euclidean distance  $\|uv\|$ . In other words,  $w_{uv} > w_{xy}$  if  $\|uv\| > \|xy\|$  and  $w_{uv} = w_{xy}$  if  $\|uv\| = \|xy\|$ . For example, in the literature it is often assumed that  $w_{uv} = c + \|uv\|^\beta$ , where  $c$  is a positive constant real number, real number  $\beta \in [2, 5]$  depends on the transmission environment, and  $\|uv\|$  is the Euclidean distance between points  $u$  and  $v$ . We also assume that all nodes have omnidirectional antennas, i.e., if the signal transmitted by a node  $u$  can be received by a node  $v$ , then it will be received by all nodes  $x$  with  $\|ux\| \leq \|uv\|$ . In addition, we assume that all nodes can adjust the transmission power dynamically. Specifically, each node  $u$

has a maximum transmission power  $\mathcal{E}_{\max}$  and we assume that it can adjust its power to be exactly  $w_{uv}$  to support the communication to another node  $v$ . Consequently, if all wireless nodes transmit in their maximum power, they define a wireless network that has a link  $uv$  iff  $w_{uv} \leq \mathcal{E}_{\max}$ . This communication graph is also called unit disk graph (UDG). When nodes adjust their power dynamically, we say that a node  $u$  can reach a node  $v$  in an *asymmetric* communication model if node  $u$  transmits at a power at least  $w_{uv}$ . Notice that here, in asymmetric communications, node  $v$  may transmit at a power less than  $w_{vu}$ . We say that a node  $u$  can reach a node  $v$  in a *symmetric* communication model if both node  $u$  and  $v$  transmit at a power at least  $w_{uv}$ . In this paper, we only concern about symmetric communication model.

An observation of this model is that the network topology is entirely dependent on the transmission range of each individual node. Links can be added or removed when a node adjusts its transmission range. A *power assignment*  $\mathcal{P}$  is an assignment of power setting  $\mathcal{P}(v_i)$  to wireless node  $v_i$ . Given a power assignment  $\mathcal{P}$ , we can define an induced direct communication graph  $\vec{G}_{\mathcal{P}}$  in which there is a directed edge  $\vec{uv}$  if and only if  $w_{uv} \leq \mathcal{P}(u)$ . We define the induced undirected communication graph  $G_{\mathcal{P}}$  in which there is an edge  $uv$  if and only if  $w_{uv} \leq \mathcal{P}(u)$  and  $w_{uv} \leq \mathcal{P}(v)$ . We will hereby refer  $G_{\mathcal{P}}$  to as the *induced communication graph*. If all wireless nodes transmit in their maximum power  $\mathcal{E}_{\max}$ , the induced communication graph is called the *original communication graph* (unit disk graph), which provides information about all possible topologies, in accordance with characteristics of the wireless environment and node power constraints. In other words, all possible achievable network topologies are subgraphs of the original communication graph. On the other hand, given a subgraph  $G = (V, E)$  of the original communication graph, we can also extract a minimum power assignment  $\mathcal{P}_G$ , where  $\mathcal{P}_G(u) = \max_{\{v|uv \in E\}} w_{uv}$ , to support the subgraph. We call this  $\mathcal{P}_G$  an *induced power assignment* from  $G$ .

Due to the importance of energy efficiency in wireless ad hoc networks, minimum power assignment for different network issues have been addressed recently. Research efforts have focused on finding the minimum power assignment so that the induced communication graph has some "good" properties in terms of network tasks such as disjoint paths, connectivity or fault-tolerance. The minimum energy connectivity problem was first studied by Chen and Huang [6], in which the induced communication graph is strongly connected while the power assignment is minimized. This problem has been shown by them to be NP-hard. Recently, this problem has been heavily studied and many approximation algorithms have been proposed when the network is modelled by using symmetric links or asymmet-

\* Department of Computer Science, Illinois Institute of Technology, 10 W. 31st Street, Chicago, IL 60616. Emails: wangyu1@iit.edu, xli@cs.iit.edu

ric links [7], [8], [9], [10], [14]. Along this line, several authors [11], [12], [13] considered the minimum power assignment while the resulting network is  $k$ -strongly connected or  $k$ -connected. This problem has been shown to be NP-hard too. Solving this problem can improve the fault tolerance of the network. In [15], [16], [8], Clementi *et. al* also considered the minimum energy connectivity problem while the induced communication graph have a diameter bounded by a constant  $h$ . In [17], Lloyd *et. al* proposed one general framework that leads to an approximation algorithm for minimizing total power assignment. Using the framework they proposed a new 2-connected approximation method for power assignment. In [18], Krumke *et. al* also studied the minimum power assignment so that networks satisfy specific properties such as connectivity, bounded diameter and minimum node degree. Other relevant work in the area of power assignment (or called energy-efficiency) includes energy-efficient broadcasting and multicasting in wireless networks. The problem, given a source node  $s$ , is to find a minimum power assignment such that the induced communication graph contains a spanning tree rooted at  $s$ . This problem was proved to be NP-hard. In [1], [2], [3], [4], they presented some heuristic solutions and gave some theoretical analysis. Recently, Srinivas and Modiano [5] also studied finding  $k$ -disjoint paths for a *given* pair of nodes while minimizing the total node power needed by nodes on these  $k$ -disjoint paths. An excellent survey of some recent theoretical advances and open problems on energy consumption in ad hoc networks can be found in [19].

In this paper, we consider a new minimum power assignment problem which is not studied previously. The question that we will study is to find the optimum transmission power of each individual node such that 1) the induced communication graph is a spanner of the original communication graph; 2) the total (or the maximum) power of all nodes is minimized. Here, a subgraph  $H = (V, E')$  is a  $t$ -spanner of  $G = (V, E)$  if for every  $u, v \in V$ , the length (or weight) of the shortest path between them in  $H$  is at most  $t$  times of the length of the shortest path between them in  $G$ . The value of  $t$  is called the *stretch factor* or *spanning ratio*. If it is bounded by a constant, we say  $H$  is a spanner of  $G$ . Therefore, if the induced communication graph is a spanner of the original communication graph, then we guarantee there is a path between each pair of nodes whose length or power consumption is similar or "not bad" compared with the original possible ones when every node uses its maximum power. Clearly, for this problem, a necessary and sufficient condition that a solution exists is that the unit disk graph is connected when all nodes transmit at the maximum power  $\mathcal{E}_{\max}$ .

The rest of the paper is organized as follows. In Section II, we present a polynomial time algorithm to find the power assignment whose maximum is minimized (called *min-max power assignment* hereafter) such that the induced communication graph is a spanner. In Section III, we present an  $O(1)$ -approximation algorithm to find the minimum total radius assignment (minimum total radius assignment) such that the induced communication graph is a spanner. In Section IV, we show that it is NP-hard to find the minimum total power assignment (min-total power assignment) such that the induced communication graph is a spanner. Then we give two simple power assignment methods for this problem. We present the performances comparison of those

two min-total power assignment algorithms in Section V. We conclude our paper with discussions of possible future research directions in Section VI.

## II. MIN-MAX POWER ASSIGNMENT

The formal definition of minimum maximum power assignment (min-max power assignment) problem is as follows:

*Input:* A set of  $n$  wireless node  $V$ , maximum node power  $\mathcal{E}_{\max}$ , and a real constant  $t_0 \geq 1$ . Notice that given  $V$  and  $\mathcal{E}_{\max}$ , it induces the original communication graph  $UDG$ .

*Output:* A power assignment  $\mathcal{P} = \{\mathcal{P}(v_1), \mathcal{P}(v_2), \dots, \mathcal{P}(v_n)\}$ .

*Object:* Minimize  $\max_{v \in V} \mathcal{P}(v)$  and guarantee that the induced graph  $G_{\mathcal{P}}$  is a  $t_0$ -spanner of  $UDG$ .

It is obvious that we can solve the min-max power assignment problem in polynomial time by using a binary search scheme. Notice that since the problem only wants to minimize the maximum node power, we only need consider the case when all nodes are assigned the same power, say  $\mathcal{P}(v)$ . Clearly, we can use binary search among all possible power assignments  $\mathcal{P}(v)$  to find the minimum.

### Algorithm 1: MIN-MAX POWER ASSIGNMENT

1. **Building  $UDG$ :** Using  $V$  and  $\mathcal{E}_{\max}$ , we first build the unit disk graph  $UDG$ , where there is an edge  $uv$  if and only if  $w_{uv} \leq \mathcal{E}_{\max}$ . Then we sort weights of all edges  $uv \in UDG$ , and get all possible node powers  $w_1, w_2, \dots, w_m$ , where  $w_1 < w_2 < \dots < w_m \leq \mathcal{E}_{\max}$  and  $m \leq n^2$  is at most the number of links in  $UDG$ .

2. **Binary search:** Initially  $i = 1$ , and  $k_i = \lceil \frac{m}{2} \rceil$ , set the power of all nodes to be  $\mathcal{P}(v) = w_{k_i}$ .

(a) **Building  $G_{\mathcal{P}}$ :** Using  $V$  and  $\mathcal{P}(v)$ , build the induced communication graph  $G_{\mathcal{P}}$ , where there is an edge  $uv$  if and only if  $w_{uv} \leq \mathcal{P}(v)$ .

(b) **Computing spanning ratio:** Call a shortest path algorithm to compute the spanning ratio  $t_0$  for  $G_{\mathcal{P}}$  according the  $UDG$ .

(c) **Select new power  $\mathcal{P}(v)$ :** If  $t \leq t_0$  then  $k_{i+1} = \lceil \frac{k_i}{2} \rceil$ , otherwise  $k_{i+1} = \lceil k_i + \frac{m-k_i}{2} \rceil$ . If  $k_{i+1} = k_i$  then quit the loop, else set the power of all nodes to be  $\mathcal{P}(v) = w_{k_{i+1}}$  and  $i = i+1$ , goto step 2(a).

Here, spanning ratio could be length or power spanning ratio. The correctness of this algorithm is obvious. The running time of the first step is  $O(n^2 + m \log m)$ . Recall that the all-pairs shortest paths can be found in  $O(n^2 \log n + mn)$ , so computing the spanning ratio of given graph  $G_{\mathcal{P}}$  costs  $O(n^2 \log n + mn)$ . The second binary search step will call the all-pairs shortest paths  $\log m = O(\log n)$  times, thus, the overall time complexity is  $O(\log n \cdot n \cdot (n \log n + m)) = O(n^2 \log^2 n + mn \log n)$ . Therefore, the running time of our algorithm is at most  $O(n^3 \log n)$ .

Notice that here the weight function  $w_{uv}$  can be any weight functions, such as Euclidean distance of a link or the power needed to support the communication of the link. In addition, if we change the objective property of the induced graph from spanner to other properties, as long as the property can be tested in polynomial time and is *monotone* [17], we can solve min-max power assignment problem in polynomial time. For example, we can find the min-max power assignment while the induced graph is connected, or has  $k$ -disjoint paths. However, some properties cannot be tested in polynomial time (if  $N \neq NP$ ),

e.g., the induced graph is  $k$ -connected, and lengths of these  $k$  paths are all bounded by some constant factor of the length of shortest path in the original communication graph. In [17], Lloyd *et al* gave an example property "G IS A TREE", which can be tested in polynomial time and makes the power assignment problem NP-complete even without any minimization objective.

### III. RADIUS ASSIGNMENT

In this section we consider problem of finding a transmission radius assignment such that the induced graph is a spanner and the total assigned radius of all nodes is minimized. We call it *min-total radius assignment* problem hereafter. There are two differences between min-total radius assignment and min-max power assignment: 1) the weight function now is the Euclidean length of the link, i.e.  $w_{uv} = \|uv\|$ ; 2) we want to minimize the total assigned radius instead of the maximum node power of the network. The formal definition of min-total radius assignment problem is as follows:

*Input:* A set of  $n$  wireless node  $V$ , maximum node radius  $\mathcal{R}_{\max}$ , and a real constant  $t_0 \geq 1$ . Notice that given  $V$  and  $\mathcal{R}_{\max}$ , it induces the original communication graph  $UDG$ .

*Output:* A radius assignment  $\mathcal{R} = \{\mathcal{R}(v_1), \mathcal{R}(v_2), \dots, \mathcal{R}(v_n)\}$ .

*Object:* Minimize  $\sum_{v \in V} \mathcal{R}(v)$  and guarantee that the induced graph  $G_{\mathcal{R}}$  is a  $t_0$ -spanner of  $UDG$ .

This problem seems much harder than min-max power/radius assignment, although it is still open whether it is a NP-hard problem. In this paper, we will present an  $O(1)$ -approximation algorithm for this problem, in which we first construct a spanner using a method presented in [20], [25] and then bound the total edge length of the structure using a greedy method in [21]. For completeness of presentation, we review the methods of constructing a bounded degree spanner with spanning ratio  $t_1$ . We first divide the unit disk centered at each node  $u$  into  $k$ -equal sized cones, where  $k \geq \pi / \arcsin \frac{1-1/\sqrt{t_1}}{2}$ . For each cone apexed at node  $u$ , we select the shortest link  $w$  (the link  $\vec{uw}$  is directed actually). After processing all nodes, we have a directed graph called *Yao* structure. For each node  $v$ , for each cone, we select the shortest incoming link  $\vec{wv}$ , and then partition the incoming neighbors locating inside this cone using the cone partition centered at node  $u$ . Then select the closest such neighbor (say  $w$ ) at each cone apexed at  $u$  and add link  $\vec{wv}$ . Repeat the above procedure until all neighbors are processed. The final structure by ignoring the link direction is called *YaoSink*, which is a  $t_1$  spanner, and the node degree is bounded by  $(k+1)^2 - 1$ .

We then review the greedy method with parameter  $\alpha$  to bound the total edge length of a  $t_1$ -spanner. Consider any sparse spanner  $G$  with spanning ratio  $t_1$  on a point set. Initialize the final structure  $H$  to be empty. We first add all edges in  $G$  with length at most  $D/n$  to  $H$ , where  $D$  is the diameter of the point set. Then we process the remaining edges of  $G$  in the increasing order of their lengths. An edge  $wv \in G$  is added to  $H$  if there is no path in  $H$  connecting  $u$  and  $v$  with length  $\leq \alpha \|uv\|$ . Gudmundsson *et al.* [21] gave a method to perform such query efficiently by bucketing the remaining edges of  $G$  into  $\log n$  groups. It is proven that the final structure  $H$  has spanning ratio  $\alpha \cdot t_1$  and its total edge length is at most  $O(w(EMST))$ , where  $w(EMST)$  is the total edge length of Euclidean MST. Generally, for a gen-

eral weighted graph  $G = (V, E, w)$ , let  $w(G) = \sum_{uv \in G} w_{uv}$ , where  $w_{uv}$  is the weight of link  $uv$ . When the weight is the Euclidean distance, the weight function is omitted hereafter. The weight of a node  $u$  in the weighted graph  $G = (V, E, w)$  is  $\mathcal{P}(u) = \max_{uv \in E} w_{uv}$ , and the total node weight of the graph is  $\mathcal{P}(G) = \sum_{u \in V} \mathcal{P}(u)$ .

Our algorithm to solve the min-total radius assignment problem is then as follows:

#### Algorithm 2: MIN-TOTAL RADIUS ASSIGNMENT

1. **Building UDG:** Using  $V$  and  $\mathcal{R}_{\max}$ , we build the unit disk graph, where there is an edge  $uv$  if and only if  $w_{uv} \leq \mathcal{R}_{\max}$ .
2. **Building spanner:** Use the method by [20], [25] to build a  $\sqrt{t_0}/t$ -spanner  $H$  of  $UDG$  where  $t$  is a positive real constant smaller than  $t_0$ .
3. **Bounding weight:** Run the method in [21] to bound the total edge length of  $H$  while the spanning ratio of the final structure is  $t_0$ . The parameter of the greedy method is  $\alpha = \sqrt{t_0} \cdot t$ . Clearly, the final structure (denoted by  $G$ ) has spanning ratio  $t_0$ .
4. **Radius assignment:** Extract the induced radius assignment  $\mathcal{R}_G$ , where  $\mathcal{R}_G(u) = \max_{\{v|uv \in G\}} w_{uv}$ .

The above algorithm has running time  $O(n \log n)$  (after UDG is built) since remaining steps have running time at most  $O(n \log n)$  [20], [25], [21]. Obviously, the summation of radii assigned to all nodes is at most  $2w(G)$ , which is at most  $O(w(EMST))$ .

We then show that the lower bound of min-total radius assignment is  $w(EMST)$ . Generally, the total power assignment  $\mathcal{P}(G)$  based on any weighted graph  $G$ , to guarantee the connectivity, satisfying the following condition

$$w(EMST(G)) \leq \mathcal{P}(G).$$

Notice that the communication graph induced by the power assignment  $\mathcal{P}_G$  is connected. We root the tree  $EMST(G)$  at an arbitrary node. For any link  $uv \in EMST(G)$  where  $u$  is the parent of  $v$ , we associate link  $uv$  to node  $v$ , and call  $uv$  as  $A(v)$ . The definition is valid since each node can only have one parent. Clearly,  $w(EMST(G)) = \sum_u w(A(u))$ . On the other hand,  $\mathcal{P}(u)$  is at least the weight of the link  $A(u)$ . Consequently,

$$w(EMST(G)) = \sum_u w(A(u)) \leq \sum_u \mathcal{P}(u).$$

Since the min-total radius assignment produces a communication graph with bounded spanning ratio, it clearly guarantees the connectivity of the induced communication graph. Thus, we have the following lemma and theorem.

*Lemma 1:* The optimum radius assignment for min-total radius assignment problem has total radius at least  $w(EMST)$ .

*Theorem 2:* Algorithm 2 gives a solution that is within a constant factor of the optimum.

Obviously, we can find a bounded degree subgraph with the same spanning ratio of the communication graph induced by the radius assignment calculated by Algorithm 2. If we want to find a subgraph of the induced communication graph with some additional properties such as *planar*, *fault-tolerance*, we have to replace the second step of Algorithm 2 by some other spanners. For example, Li and Wang [22] gave a method to construct a planar spanner with bounded degree. Recently, Czumaj and Zhao

[23] also proposed a  $k$ -vertex fault-tolerant spanner whose total cost is  $O(k^2 \cdot w(EMST))$ .

#### IV. MIN-TOTAL POWER ASSIGNMENT

Finally, we consider the minimum total power assignment (min-total power assignment) problem.

*Input:* A set of  $n$  wireless node  $V$ , maximum node power  $\mathcal{E}_{\max}$ , and a real constant  $t_0 \geq 1$ . Given  $V$  and  $\mathcal{E}_{\max}$ , it induces the original communication graph  $UDG$ . Here, the weight function of a link  $uv$  becomes  $w_{uv} = \|uv\|^2$ .

*Output:* A power assignment  $\mathcal{P} = \{\mathcal{P}(v_1), \mathcal{P}(v_2), \dots, \mathcal{P}(v_n)\}$ .

*Object:* Minimize  $\sum_{v \in V} \mathcal{P}(v)$  and guarantee that the induced graph  $G_{\mathcal{P}}$  is a  $t_0$ -spanner of  $UDG$ .

Clearly, this problem is a NP-hard problem since the minimum energy connectivity problem is the special case of the minimum total power assignment problem in which  $t_0$  is chosen sufficiently large. Remember the minimum total power assignment problem for connectivity is NP-hard [6]. Although there are several constant approximation methods for the minimum total power assignment problem for connectivity, it is still an open problem whether we can find a constant approximation algorithm for the minimum total power assignment problem with bounded spanning ratio. In this paper, we give two simple heuristic algorithms.

Our first approach is a simple greedy heuristic algorithm.

*Algorithm 3:* GREEDY MIN-TOTAL POWER ASSIGNMENT

1. **Building UDG:** Using  $V$  and  $\mathcal{E}_{\max}$ , we first build the  $UDG$ .
2. **Sorting UDG edges:** Sorting edges in UDG according their weights, get  $e_1, e_2, \dots, e_m$ , where  $w_{e_1} \leq w_{e_2} \leq \dots \leq w_{e_m}$ .
3. **Greedy method:** Initialize  $G$  to be an empty graph. Following the increasing order, add an edge  $e_i = uv$  to  $G$  if and only if no path in  $G$  (already added edges) with total power no more than  $t_0 \cdot \|uv\|^2$ .
4. **Power assignment:** Extract the induced power assignment  $\mathcal{P}_G$ , where  $\mathcal{P}_G(u) = \max_{\{v|uv \in G\}} w_{uv}$ .

The running time of the first step is  $O(n^2)$ . Sorting the edges takes  $O(m \log m)$ . Recall that the single source shortest path algorithm can be done in  $O(n \log n + m)$ . The greedy step calls at most  $m$  times shortest path algorithm, so the cost is  $O(n^2 \log n + mn)$ . The last step takes at most  $O(m)$ , thus, the total costs is  $O(n^2 + m \log m + n^2 \log n + mn + m)$  which is  $O(n^3)$  when  $m = O(n^2)$ .

The second method is based on *Yao graph*. The *Yao graph* [24] with an integer parameter  $k \geq 6$ , denoted by  $\overrightarrow{YG}_k(G)$ , is defined as follows. At each node  $u$ , any  $k$  equally-separated rays originated at  $u$  define  $k$  cones. In each cone, choose the shortest edge  $uv$  among all edges from  $u$ , if there is any, and add a directed link  $\overrightarrow{uv}$ . Ties are broken arbitrarily. The resulting directed graph is called the Yao graph. Let  $YG_k(G)$  be the undirected graph by ignoring the direction of each link in  $\overrightarrow{YG}_k(G)$ . Li *et al.* [25] proved the power stretch factor of the Yao graph  $YG_k(V)$  is at most  $\frac{1}{1 - (2 \sin \frac{\pi}{k})^\beta}$ . They [26] also proposed to apply the Yao structure on top of the Gabriel graph structure and proved it still has a same constant bounded power stretch factor  $\frac{1}{1 - (2 \sin \frac{\pi}{k})^\beta}$ . Then the idea of our second method is to construct the  $t_0$ -spanner based on Yao structure. Consider UDG, for each node, we partition the disk into cones, and select the shortest

edge of UDG in each cone. The number of cones  $k$  is chosen so that the power spanning ratio is  $t_0$ , i.e.  $\frac{1}{1 - (2 \sin \frac{\pi}{k})^\beta} \leq t_0$ . Thus,

$k \geq \pi / \arcsin \frac{\sqrt{1-1/t_0}}{2}$ . Notice, in Yao graph the cone partition does not need to be aligned. Therefore, we can choose a rotation for each node such that the maximum chosen incident link is the smallest. Obviously, there are only  $d_u$  different rotations that may produce different power assignments,  $d_u$  is the degree of the node  $u$  in UDG.

*Algorithm 4:* YAO-based MIN-TOTAL POWER ASSIGNMENT

1. **Building UDG:** Using  $V$  and  $\mathcal{E}_{\max}$ , we first build the  $UDG$ .
2. **Building Yao graph:** Set  $k \geq \pi / \arcsin \frac{\sqrt{1-1/t_0}}{2}$ , apply  $YG_k$  on UDG. For each node  $u$ , assume that it has  $d_u$  edges  $uv_1, uv_2, \dots, uv_{d_u}$  in UDG. Then for each edge  $uv_i$ , we can assign a cone partition  $\mathcal{C}_i$  (one of the cones started at link  $uv_i$ ). We test Yao structure of  $u$  for all the  $d_u$  cone partitions  $\mathcal{C}_i$ , and select the one whose maximum chosen link incident is the smallest. The union of Yao structures of all nodes forms a graph  $G$ .
3. **Power assignment:** Extract the induced power assignment  $\mathcal{P}_G$ , where  $\mathcal{P}_G(u) = \max_{\{v|uv \in G\}} w_{uv}$ .

The running time of the first step and last are the same with those of the previous algorithm. The total time of building one Yao graph takes  $O(m)$ . In our algorithm, we build at most  $d_u$  Yao structures at node  $u$ , so totally at most  $\max_u(d_u)$  Yao graph. Therefore, the cost is at most  $O(mn)$ . Then, the total costs of Yao-based algorithm is  $O(mn)$ , which is at most  $O(n^3)$ . It seems that its running time is similar with the greedy one. However, this algorithm is much faster than the first one practically, and more importantly it can be performed in a localized way. Remember for each node to building one Yao structure, it only takes at most  $O(d_u)$ . So at each node, building  $d_u$  Yao structures takes at most  $O(d_u^2)$ . And since this algorithm can be done locally, it is quite suitable for wireless ad hoc networks.

#### V. EXPERIMENTS

We conducted extensive simulations of our min-total power assignment methods. In our experiments, we randomly generate a set  $V$  of  $n$  wireless nodes and its  $UDG(V)$ , and test the connectivity of  $UDG(V)$ . If it is connected, we apply these two min-total power assignment methods and also the MST-based method to assign power for each node. Then we compare the total power of the final power assignments. In the experimental results presented here, we generate 100 random wireless nodes in a  $10 \times 10$  square; the spanner parameter  $t_0 = 2$ ; and the maximum power is set 2.5. We generate 100 vertex sets  $V$  (each with 100 vertices) and then apply the min-total power assignment methods for each of these 100 vertex sets. The average and the maximum are computed over all these 100 vertex sets. Figure 1 gives an example of the original communication graph and different induced communication graphs by different min-total power assignment methods. Table I compares the performances of our methods with the performance of the power assignment based on MST. Remember that, it is already known [6], [7], [8] that the power assignment based on MST is within twice of the optimum power assignment for connectivity only. In this paper, we are interested in power assignment such that the induced communication graph is a spanner. and we also proved in Section III that the optimum min-total power assignment has a

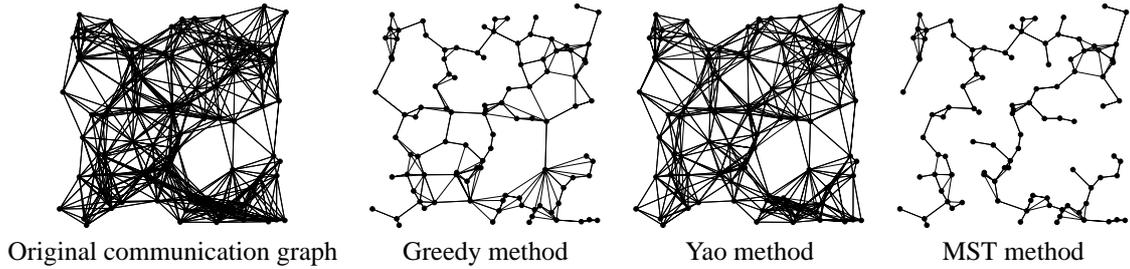


Fig. 1. Different induced communication graphs under the different power assignments from the same original communication graph.

lower bound  $w(MST(UDG))$ . From Table I, we found that the total power assignment by greedy-based and Yao-based methods are within small constant factor of  $w(MST(UDG))$ . Also both the power assignment methods save many energy compared with UDG (i.e. every node uses the maximum transmission power). Notice that the spanning ratio of the communication graph induced from the power assignment induced from MST is large (almost 15 in the worst case) while the communication graph induced by our power assignment methods has spanning ratios less than 2. Yao-based method keeps more links and spends more power, however it is easy to perform locally. In summary, our new min-total power assignment heuristics are suitable for power assignment tasks in ad hoc networks.

TABLE I

ASSIGNED POWER AND SPANNING RATIOS FOR DIFFERENT METHODS.

	MST	GREEDY	YAO
Avg Total-Power ( $\mathcal{P}(G)$ )	78.92	106.72	366.21
Avg $\mathcal{P}(G)/\mathcal{P}(UDG)$	0.126	0.170	0.585
Avg $\mathcal{P}(G)/\mathcal{P}(MST)$	1.00	1.352	4.65
Max $\mathcal{P}(G)/\mathcal{P}(MST)$	1.00	1.650	5.53
Avg Spanning Ratio	1.424	1.060	1.000
Max Spanning Ratio	14.84	1.999	1.097

## VI. CONCLUSION

In this paper, we studied the power assignment such that the induced communication graph is a spanner for the original communication graph when all nodes have the maximum power. Polynomial time algorithm was given to minimize the maximum assigned power. We also gave a polynomial time approximation method to minimize the total transmission radius of all nodes. We gave two heuristics and conducted extensive simulations to study their performance when we want to minimize the total assigned power of all nodes. Our simulations validated our theoretical claims. We would like to know if the min-total radius assignment is NP-hard and to design approximation algorithms for min-total power assignment problem.

## REFERENCES

- [1] P.-J. Wan, G. Calinescu, X.-Y. Li, and O. Frieder, "Minimum-energy broadcast routing in static ad hoc wireless networks," *ACM Wireless Networks*, 2002, Short version in INFOCOM 2000.
- [2] A. Clementi, P. Crescenzi, P. Penna, G. Rossi, and P. Vocca, "On the complexity of computing minimum energy consumption broadcast subgraphs," in *18th Symp. on Theoretical Aspects of CS, LNCS 2010*, 2001.
- [3] J. Wieselthier, G. Nguyen, and A. Ephremides, "On the construction of energy-efficient broadcast and multicast trees in wireless networks," in *Proc. of IEEE INFOCOM 2000*, 2000, pp. 586–594.
- [4] G. Huiban and Y. C. Verhoeven, "A self-stabilized distributed algorithm for the range assignment in ad-hoc wireless networks," *Soumis Parallel Processing Letters*.
- [5] A. Srinivas and E. Modiano, "Minimum energy disjoint path routing in wireless ad-hoc networks," in *Proc. of ACM 9th MobiCom*, 2003.
- [6] W.-T. Chen and N.-F. Huang, "The strongly connecting problem on multi-hop packet radio networks," *IEEE Transactions on Communications*, vol. 37, no. 3, pp. 293–295, 1989.
- [7] L. M. Kirousis, E. Kranakis, D. Krizanc, and A. Pelc, "Power consumption in packet radio networks," *Theoretical Computer Science*, vol. 243, no. 1–2, pp. 289–305, 2000.
- [8] A. E. F. Clementi, P. Penna, and R. Silvestri, "On the power assignment problem in radio networks," *Electronic Colloquium on Computational Complexity (ECCC)*, , no. 054, 2000.
- [9] D. Blough, M. Leoncini, G. Resta, and P. Santi, "On the symmetric range assignment problem in wireless ad hoc networks," in *Proc. of the 2nd IFIP International Conference on Theoretical Computer Science (TCS)*, 2002.
- [10] E. Althaus, G. Călinescu, I. Mandoiu, S. Prasad, N. Tchervenski, and A. Zelikovsky, "Power efficient range assignment in ad-hoc wireless networks," in *IEEE WCNC03*, 2003.
- [11] M. Hajiaghayi, N. Immerlica, and V. S. Mirrokni, "Power optimization in fault-tolerant topology control algorithms for wireless multi-hop networks," in *Proc. of ACM 9th MobiCom*, 2003, pp. 300–312.
- [12] G. Călinescu and P.-J. Wan, "Range assignment for high connectivity in wireless ad hoc networks," in *AdHoc-Now 03*, 2003.
- [13] J. Cheriyan, S. Vempala, and A. Vetta, "Approximation algorithms for minimum-cost k-vertex connected subgraphs," in *Proc. of the 34th annual ACM STOC*, 2002, pp. 306–312, ACM Press.
- [14] R. Ramanathan and R. Hain, "Topology control of multihop wireless networks using transmit power adjustment," in *IEEE INFOCOM*, 2000.
- [15] A. E. F. Clementi, A. Ferreira, P. Penna, S. Perennes, and R. Silvestri, "The minimum range assignment problem on linear radio networks," in *European Symposium on Algorithms*, 2000, pp. 143–154.
- [16] A. Clementi, P. Penna, and R. Silvestri, "The power range assignment problem in radio networks on the plane," in *XVII Symposium on Theoretical Aspects of CS (STACS'00), LNCS(1770):651–660*, 2000.
- [17] E. L. Lloyd, R. Liu, M. V. Marathe, R. Ramanathan, and S. S. Ravi, "Algorithmic aspects of topology control problems for ad hoc networks," in *Proceedings of the 3rd ACM MobiHoc*, 2002, pp. 123–134.
- [18] S. O. Krumke, R. Liu, E. L. Lloyd, M. V. Marathe, R. Ramanathan, and S. S. Ravi, "Topology control problems under symmetric and asymmetric power thresholds," in *ADHOC-NOW*, 2003, pp. 187–198.
- [19] A. E. F. Clementi, G. Huiban, P. Penna, G. Rossi, and Y. C. Verhoeven, "Some recent theoretical advances and open questions on energy consumption in ad-hoc wireless networks," in *3rd Workshop on Approximation and Randomization Algorithms in Communication Networks*, 2002.
- [20] S. Arya, G. Das, D. Mount, J. Salowe, and M. Smid, "Euclidean spanners: short, thin, and lanky," in *Proc. 27th ACM STOC*, 1995, pp. 489–498.
- [21] J. Gudmundsson, C. Levkopoulos, and G. Narasimhan, "Improved greedy algorithms for constructing sparse geometric spanners," in *Scandinavian Workshop on Algorithm Theory*, 2000, pp. 314–327.
- [22] X.-Y. Li and Y. Wang, "Efficient construction of bounded degree planar spanner," in *9th Annual Int. Computing and Combinatorics Conf.*, 2003.
- [23] A. Czumaj and H. Zhao, "Fault-tolerant geometric spanners," in *Proc. of the 19th conf. on Computational geometry*, 2003, pp. 1–10, ACM Press.
- [24] A. C.-C. Yao, "On constructing minimum spanning trees in k-dimensional spaces and related problems," *SIAM J. Computing*, v.11, pp.721–736, 1982.
- [25] X.-Y. Li, P.-J. Wan, and Y. Wang, "Power efficient and sparse spanner for wireless ad hoc networks," in *IEEE ICCCN'01*, 2001, pp. 564–567.
- [26] X.-Y. Li, P.-J. Wan, Y. Wang, and O. Frieder, "Sparse power efficient topology for wireless networks," in *IEEE 35th HICSS*, 2002.