

Serial Communications


(1)

Model 1



Using UART →
Same interface (voltage, timing, processor)

Model 2

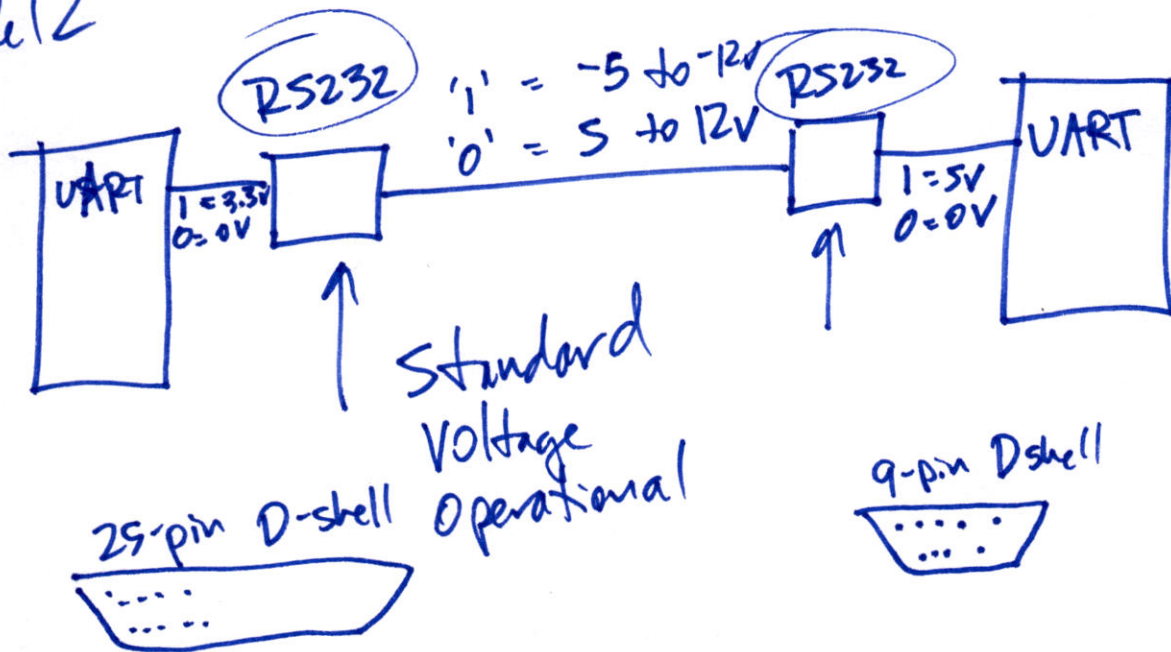

Revesas RX63N
Set up SMR with
Serial Port 2

PCLK
8 data bits even parity
2 stop bits Async

00101000
SCI2.SMR = 0x28;